




BERI

FIELDKING

World Class
Agricultural Implements...

**Perfect Tillage Partner
The North American Farmer**

- Used in open field workings for the superficial ploughing, shattering of preparation of soil for sowing, burial of organic substances & remains.
- It can be easily transported on the tyres using the hydraulic system.
- High quality boron steel disc with 48-52 HRC hardness.
- Effectively break up heavy clods because of sturdy design and weight.
- Bearing spools for better lubrication and less load on tractor.
- High quality seals are used to prevent the bearing & mud from mud & water.
- Extra heavy duty hydraulic harrow comes with optional accessories like weight & crumblers.



✉ exports@fieldking.com




www.fieldking.com

Heavy Duty Hydraulic Harrow



DESCRIPTION	FKHDH-18	FKHDH-20	FKHDH-22	FKHDH-24	FKHDH-28	FKHDH-32
FRAME (Inch)				5.2" x 5.2" x 7mm (T) (Sq. pipe frame)		
GANG BOLT (Inch)				1.6" (Solid Sq. Rod)		
NO. OF DISC	18	20	22	24	28	32
TYPE OF DISC		Notched or Plain Disc (Optional)				
DISC DIAMETER (Inch)		24" x 4.5 mm (T) or 26" x 6 mm (T)				
WIDTH OF CUT (Approx)	6 ft. 10"	6 ft. 6"	8 ft. 2"	8 ft. 10"	10 ft. 2"	11 ft. 5"
DISTANCE BETWEEN DISCS		9"				
TYRE SIZE		10.0/75-15.3 (8-16 PR), 13.0/55-16 (14 PR)				
BEARING HUBS	6			8		
WEIGHT (lbs. Approx)	3395	3593	3880	4067	4442	4784
POWER REQUIRED (HP)	65-75	80-90	90-110	115-135	140-165	170-190

Extra Heavy Duty Hydraulic Harrow

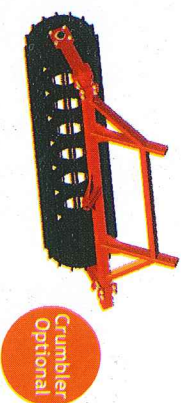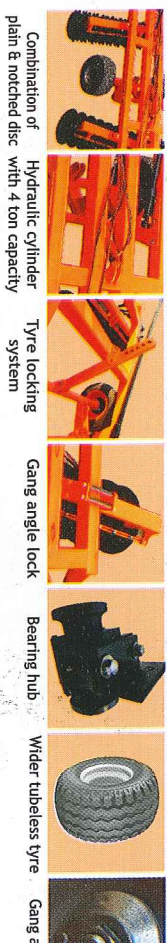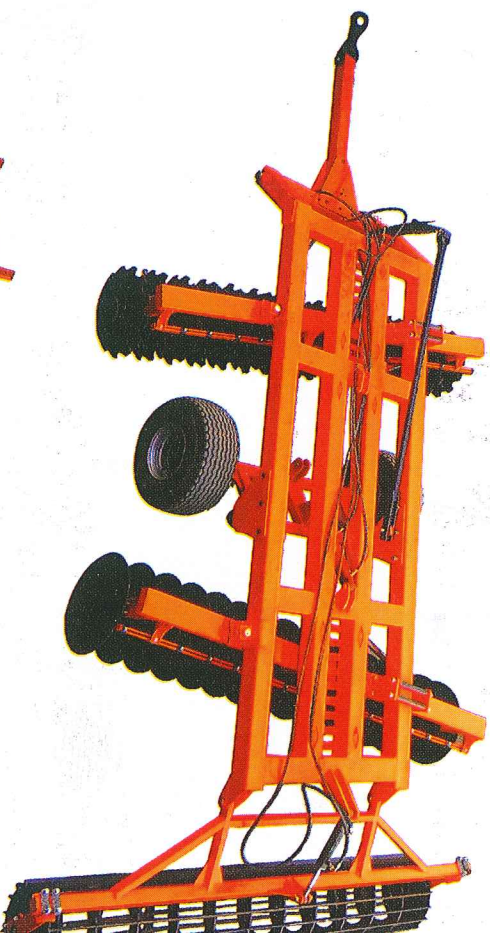

DESCRIPTION	FKEH-24	FKEH-28	FKEH-32	FKEH-36
FRAME			6" x 6" x 8 mm (T) (Sq. Pipe Frame)	
GANG BOLT/AXLE			1.6" (Solid Sq. Rod)	
NO. OF DISC	24	28	32	36
TYPE OF DISC		Notched Disc in Front Gang & Plain Disc in Rear Gang		
DISC DIAMETER		26" x 6 mm (T) or 28" x 7 mm (T)		
WIDTH OF CUT (Approx.)	8ft. 10"	10ft. 2"	11ft. 6"	12ft.
DISTANCE BETWEEN DISCS		9"		
TYRE SIZE		13.0/55-16 (14 PR), 400/60-15.5 (18 PR)		
BEARING HUBS	8			12
WEIGHT (lbs. Approx.)	5895	6186	6521	6946
WEIGHT WITH DEAD WEIGHT (lbs. Approx.)	3997*	7288*	7624*	8042*
TRACTOR POWER (HP)	125-140*	145-165*	170-200*	210-220*

*Due to additional dead weight extra heavy duty hydraulic harrow operates on higher range of tractor (H)

Tandem Disc Harrow Medium Duty



DESCRIPTION	FKTDHMS-12	FKTDHMS-16	FKTDHMS-20
FRAME (Inch)	Square Tubler Frame 2.5" x 2.5" x 5mm (T)		
GANG AXLE / BOLT (Inch)	1" (Solid Sq. Rod)		
NO. OF DISC	12	16	20
TYPE OF DISC	Notched or Plain Disc (as per customer requirement)		
DISC DIAMETER (Inch)	18" x 3 mm (T) and 20" x 3 mm (T)		
WIDTH OF CUT (Approx)	4 ft. 8"	6 ft. 1"	7 ft. 6"
OVERALL WIDTH (Approx)	4 ft. 8"	6 ft.	7 ft. 5"
DISTANCE BETWEEN DISCS (Inch)	9"		
NO. OF BEARING HUBS	8 (UC-210)		
WEIGHT (lbs. Approx)	662	849	970
POWER REQUIRED (HP)	25-30	35-40	45-50

Tandem Disc Harrow Heavy Duty



DESCRIPTION	FKTDHHS-20	FKTDHHS-24
FRAME (Inch)	Square Tubler Frame 3" x 3" x 5 mm (T)	
GANG AXLE / BOLT (Inch)	1-1/8" (Solid Sq. Rod)	
NO. OF DISC	20	24
TYPE OF DISC	Notched or Plain Disc (as per customer requirement)	
DISC DIAMETER (Inch)	20" x 3 mm (T) & 22" x 4 mm (T)	
WIDTH OF CUT (Approx)	7 ft. 11"	9 ft. 4"
OVERALL WIDTH (Approx)	7 ft. 5"	8 ft. 11"
DISTANCE BETWEEN DISCS (Inch)	9"	
NO. OF BEARING HUBS	8 (UC-211)	
WEIGHT (lbs. Approx)	1279	1411
POWER REQUIRED (HP)	55-65	75-90

Mounted Offset Disc Harrow



DESCRIPTION	FKMODH-12	FKMODH-14	FKMODH-16	FKMODH-18	FKMODH-20	FKMODH-22	FKMODH-24
FRAME (Inch)	3" x 3" X 10mm (T) Angle frame with 4" X 2" front channel						
GANG BOLT / AXLE	1 - 1/8" (Solid sq. rod)						
NO. OF DISC	12	14	16	18	20	22	24
TYPE OF DISC	Notched disc in front gang & Plain disc in rear gang						
DISC DIAMETER (Inch)	20" x 3mm (T) & 22" x 4mm (T)						
WIDTH OF CUT (Approx)	4 ft. 8"	5 ft. 4"	6 ft. 1"	6 ft. 9"	7 ft. 6"	8 ft. 3"	8 ft. 11"
DISTANCE BETWEEN DISCS (Inch)	9"						
BEARING HUBS	4	6	8				
WEIGHT (lbs. approx)	860	950	1102	1268	1356	1490	1612
POWER REQUIRED (HP)	30-40	40-50	50-60	60-70	70-80	80-90	90-100

*The weight, picture and working data contained in the present leaflet are supplied for information only and are not binding. Specification and size can be altered as part of ongoing product modification/improvement.

Dealer / Distributor

CE  **BERI UDYOG (P) LTD**

Corporate Office:

Plot No. 235 to 240, Sec-3, HSIDC, Karnal- 132001 (Haryana), India
 ☎ +91 184 2221571/ 72/ 73 ✉ info@fieldking.com

Sales & Marketing Office (Exports):

202, Time Centre Building, Golf Course Road, Sec-54, Gurgaon-122001
 (Haryana), India ☎ +91 124 4005093 ✉ exports@fieldking.com