

Camelback Pump Series

Features



Standard Features


- Available in three point hitch, trailer mounted & hydraulic
- Oven coated fusion finish
- Grease lubricated bearings
- Quick detach PTO shafts
- Bolted axle & pump connections for easy maintenance & repair
- Medium-duty models are available in 6" 8" & 10" models with 1 1/2" shafts
- Heavy-duty models are available in 6" through 16" models with 2" shafts

Optional Features


- Custom modification
- Grease lubricated pump bowl bearing (pump bowl bearing is a marine bearing)
- Diesel or electrical engine drive
- Control panels
- Impeller design
- Customized lengths
- Grease fitting blocks
- 45° or 90° discharge elbows
- 540 RPM or 1000 RPM models



Three Point Hitch | Trailer Mounted | Hydraulic

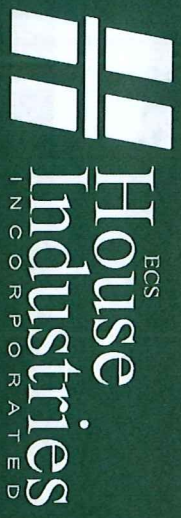


Camelback Pump Series




870.588.3773 | Fax: 870.588.4669 | www.houseindustriesinc.com
3720 Highway 1 | PO Box 67 | Cherry Valley, Arkansas 72824

Camelback Pump Series

Available Models



All performance curves were determined from actual test pool data.





CDM & CDH Models

CD6M, CD8M, CD10M (See M-Performance Curves)
 CD6H, CD8H, CD10H, CD12H, CD16H (See H-Performance Curves)



CTM & CTH Models

CT6M, CT8M, CT10M (See M-Performance Curves)
 CT6H, CT8H, CT10H, CT12H, CT16H (See H-Performance Curves)

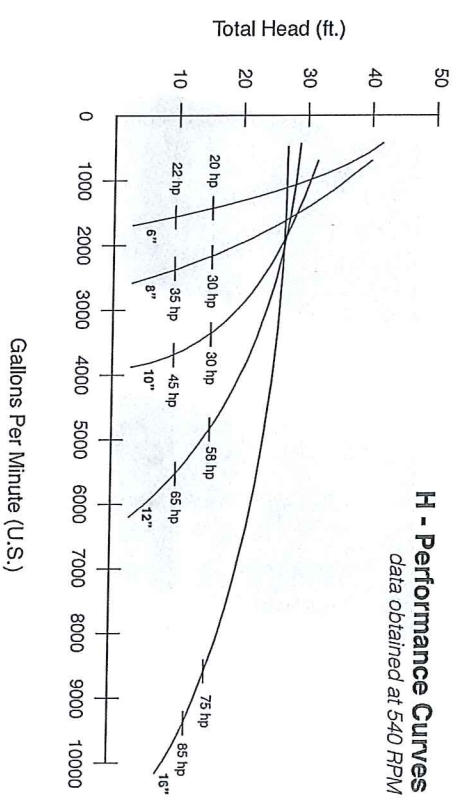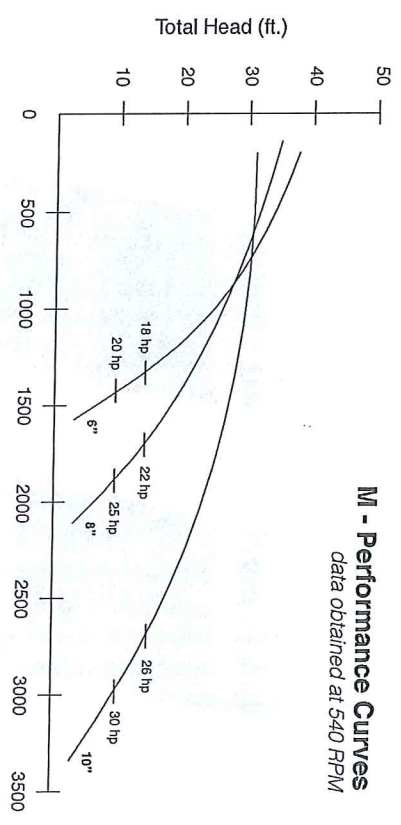

Made in the Heart of the Delta

Pump

Easylift/Easylift III Pump

[Products](#)[Manuals](#)[Brochures](#)[Overview](#)[Specifications](#)[Gallery](#)[Manuals](#)

Specifications:

EASYLIFT

<u>MODEL</u>	<u>SIZE</u>	<u>GPM</u>	<u>SHAFT</u>	<u>LENGTH</u>	<u>WEIGHT</u>	<u>PTO RPM</u>
ED6M-F	6"	1,500	1 1/2"	24'	1,220	540
ED8M-F	8"	2,000	1 1/2"	24'	1,260	540
ED10M-F	10"	3,000	1 1/2"	24'	1,300	540
ED6H-F	6"	1,800	2"	24'	1,440	540 or 1000
ED8H-F	8"	2,500	2"	24'	1,470	540 or 1000
ED10H-F	10"	3,500	2"	24'	1,520	540 or 1000
ED12H-F	12"	5,000	2"	24'	1,580	540 or 1000
ED16H-F	16"	9,500	2"	24'	1,730	540 or 1000

EASYLIFT III

<u>MODEL</u>	<u>SIZE</u>	<u>GPM</u>	<u>SHAFT</u>	<u>LENGTH</u>	<u>WEIGHT</u>	<u>PTO RPM</u>
ET6M-F	6"	1,500	1 1/2"	13'	705	540
ET8M-F	8"	2,000	1 1/2"	13'	735	540
ET10M-F	10"	3,000	1 1/2"	13'	770	540
ET6H-F	6"	1,800	2"	13'	865	540 or 1000
ET8H-F	8"	2,500	2"	13'	895	540 or 1000
ET10H-F	10"	3,500	2"	13'	930	540 or 1000
ET12H-F	12"	5,000	2"	13'	970	540 or 1000