

# DTSA 600-800

TRAILED DUSTER

DUSTERS



#### TOP QUALITY

Teyme equipment offers the highest level of satisfaction thanks to our great level of self-demand.



#### R+D+I

Research and development are the basis of our equipment's success.



#### RESPECTFUL

We care for the Earth, we care for the people.

HIGH PERFORMANCE

VERSATILITY

UNIFORMITY IN PRODUCT DELIVERY

SYSTEM AGAINST COMPACTNESS OF PRODUCT



# TEYME



# DTSA 600-800

## TECHNICAL AND MECHANICAL FEATURES



### HOPPER

Completely made of STAINLESS STEEL

Lid made of tarpaulin. Designed in order to reach a complete emptying

Anti-lumps sieve also acting as safety grid according to EC regulations.

### AIR/DUST OUTLETS

With universal anchoring device to hitch distributors of 1,2,6 and 8 outlets.



### FRAME

Strong sturdy frame with universal coupling system kits with several uses.

Footstep in order to have access to the filling-up area.

Metallic jackwheel.

Clevis tow bar for hitching. Adjustable in 6 positions.



Rear bumper.

Wedges for parking.

### SYSTEM AGAINST COMPACTNESS

Turning mixing blades triggered by hydraulic system.

This system enables to keep the product in optimal conditions for an effective treatment from the beginning to the end.

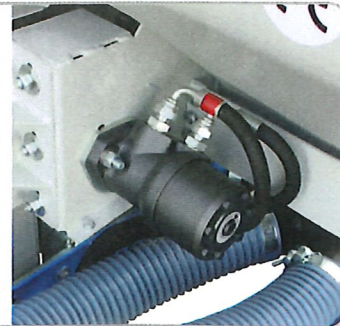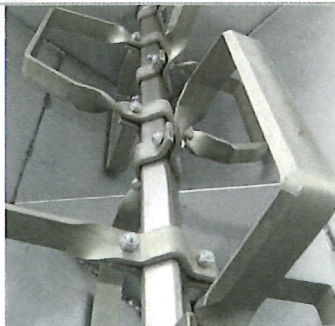

### ADJUSTABLE FEEDING

Adjustable feeding by means of worm screw triggered by hydraulic system, which enables an accurate dosage and total emptying.






Upon special request, the lid can also be made of Stainless Steel.

### DISCONNECTER

It allows mixing blades to work independently with regard to the feeding system, which is really useful during the transport because it keeps the homogeneity of the product avoiding compactness

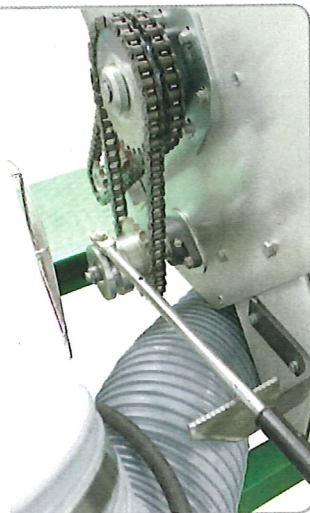

### ADJUSTABLE CONTROL

Hydraulic control from the tractor, dosage from 12 to 45 kg/Ha




### AXLE AND WHEELS

Squared axle 45x45 –  
Fixing 94/18,  
Track: 1250mm.  
Wheels 225/70R  
15-94/18 1594/18



## AIR UNIT





Gearbox.  
Speed Ratio: 1/7.5 and neutral point  
Double fan made of light material Ø400 mm  
Centrifugal clutch with smooth and progressive starting  
Aerodynamic blower-housing in two pieces with two air inlets.

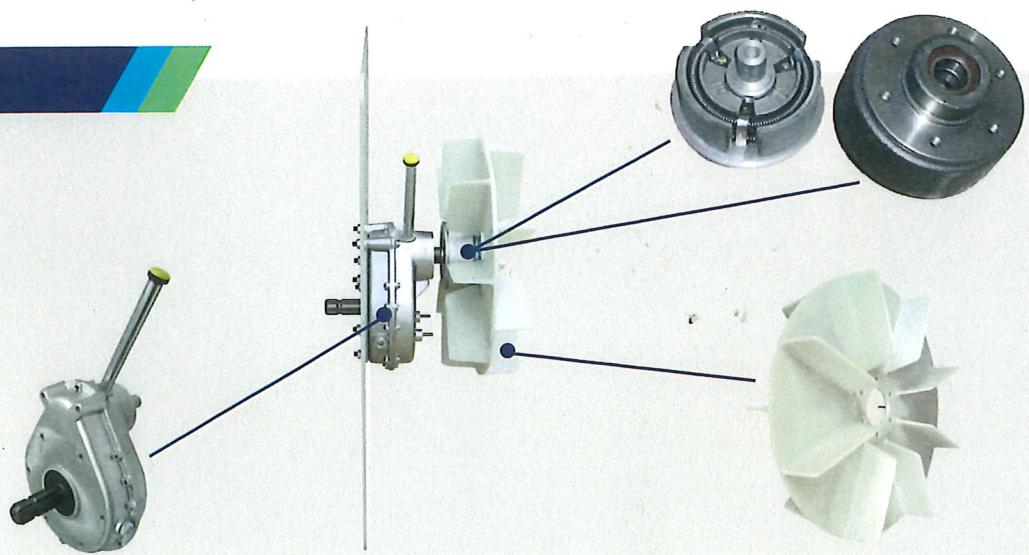



# KITS FOR THE DTSA MACHINES:

1. 2 flat outlets kit.
2. 4 or 6 fan outlets kit.
3. LAA 200 Long Range and Height Cannon.
4. 4 outlets' kit.
5. Ø200 Double Cannon.
6. 4 fan outlets kit.
7. LAA 300 Long Range and Height Cannon 80°.

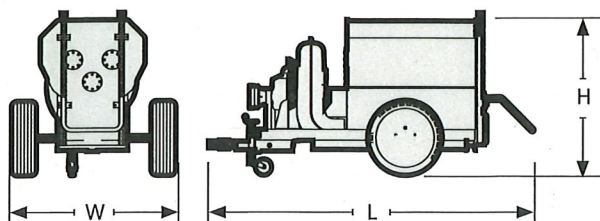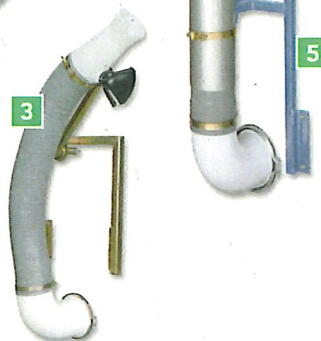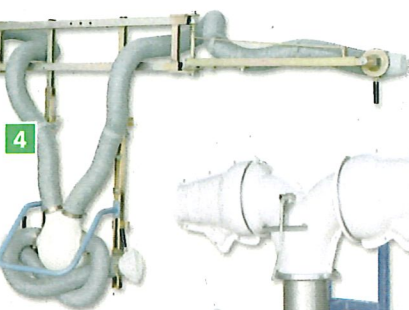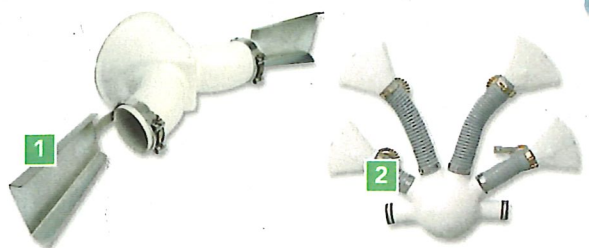


Model	Hopper l	L mm	W mm	H mm	Tare Kg
DTSA 600	600	2.950	1.250	1.400	550
DTSA 800	800	2.950	1.250	1.560	570



50m.



40m.

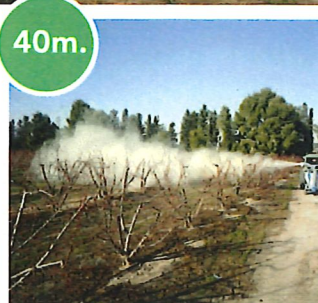

# TEYME'S PRODUCTS RANGE:

Mistblowers

Pneumatic  
Sprayers

Dusters

Boom Sprayers

Sprayers

Humidification  
and Ventilation



## TEYME

Pol. Ind. SAU -3- C/ Girona s/n  
 25131 TORRE-SERONA (Lleida)  
 T: (+34) 973 750 033  
 F: (+34) 973 751 581  
 comercial@teyme.es

[www.teyme.es](http://www.teyme.es)

DEALER: