




OPERATOR'S / PARTS MANUAL

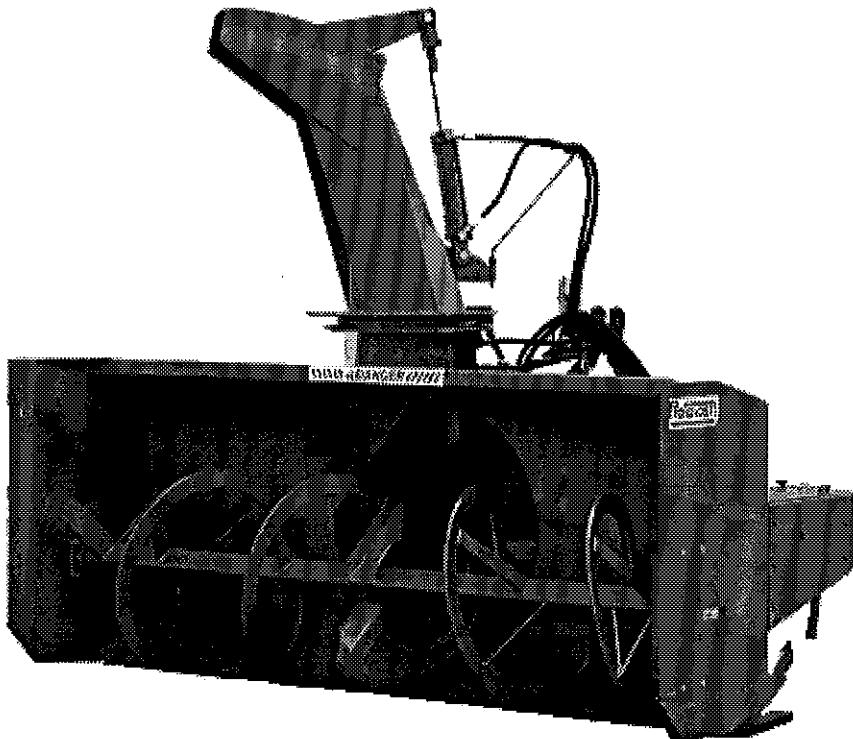

***Snowblowers* Models**

P-740 & P-740TRC

P-860 & P-860TRC

P-800 & P-800TRC

P-862 & P-862TRC


P-920 & P-920TRC P-920-98 & P-920-98TRC

Copyright © Les Machineries Pronovost Inc., 1997

All rights reserved.
Printed in Canada.

TABLE OF CONTENTS

Section	Item	Page
1	Introduction	5
2	Safety	6
	General Safety	6
	Safety in Operation	6
	Safety with Maintenance	7
	Safety in Transport	7
	Safety in Storage	7
3	Decals	8
	Safety Decals	8
	Maintenance Decals	10
4	Assembly	11
	General assembly	11
5	Start-up	12
	Basic Start-up Procedures	12
6	Maintenance	13
7	Storage	14
8	Trouble Shooting	15
9	Specifications	17
10	Parts List	18
	Snowblowers P-740 P-800 P-860	18
	Snowblowers P-740TRC P-800TRC P-860TRC	21
	Snowblower P-862	24
	Snowblower P-862TRC	27
	Snowblower P-920 P-920-98	30
	Snowblower P-920TRC P-920-98TRC	33
	Manual Chute Kit M-7486	36
	Semi-industrial Chute PSI-7486	37
	Industrial Chute PC-7486	38
	Heavy Duty Kit	39
	P.T.O. Shaft 8114	40
	P.T.O. Shaft 8202	41
	P.T.O. Shaft 9225	42
	P.T.O. Shaft 9500	43
	Gear Box 8251	44
	Gear box 9522	45
	Gear box 9307	46
	Cylinder 25TR08	47
	Hydraulic Motor DH 250 & DH 315	48
11	Torque Chart	49
12	Warranty	50



INTRODUCTION

CONGRATULATIONS!

1

Thank you for choosing PRONOVEST. We are confident this equipment will meet your requirements in terms of quality, performance and reliability.

This manual was prepared to assist you in the safe operation of your new Snowblower. It contains important information which will help you achieve excellent returns with your Snowblower for years to come.

Please read this manual completely before operating your Snowblower and keep it for future reference.

Before starting the machine, you or any other person who will be operating the Snowblower must familiarize yourself with the safety recommendations and the operating instructions. Please read carefully and be sure to understand and follow all recommendations and procedures.

In this manual, the right and left sides are identified as shown on Figure 1.

If you require additional information on your Snowblower, please contact your PRONOVEST Dealer.

NOW take a moment to enter the model, serial number and the date of purchase of your Snowblower in the space provided.

When ordering parts from your Dealer, please refer to these numbers for a fast and efficient service. Use PRONOVEST parts for replacement.

The model and serial numbers are on the name plate shown on Fig. 1.

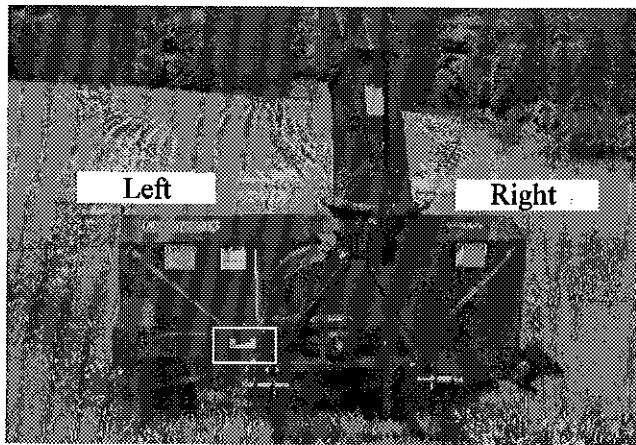


Figure 1

MODEL: _____

SERIAL NO: _____

DATE OF PURCHASE: _____

SAFETY

GENERAL SAFETY

WHEN YOU SEE THIS SYMBOL

2



ATTENTION!

**BE ALERT
YOUR SAFETY IS INVOLVED**

This symbol «SAFETY ALERT» is used in this manual and on the safety decals on the Snowblower. It warns you of the possibility of danger. Carefully read, understand and follow all safety recommendations before operating the Snowblower.

- 1) Careful operation is the best assurance against accidents. Carefully read this manual and follow all recommendations before operating your Snowblower. It is the owner's responsibility to make sure that anyone who will operate the Snowblower will read this manual before operating the equipment.
- 2) Familiarize yourself with all controls and always be ready to stop the Snowblower quickly in case of emergency.
- 3) Never let a child operate the Snowblower.
- 4) Do not modify the Snowblower. Any non authorized modification may affect the efficiency and/or safety of the equipment and will automatically void the warranty.
- 5) Never operate the Snowblower with defective parts or if damaged in any way. Have it repaired before operating.
- 6) Make sure all fasteners are in place and properly secured or tightened. Refer to torque chart on page 49.
- 7) Avoid wearing loose fitting clothing when working with the Snowblower. These could get entangled in moving parts of the equipment and cause accidents.

- 8) Prolonged exposure to noise may hamper hearing. Protect yourself by wearing adequate protection devices.
- 9) Hydraulic fluids under pressure can damage your skin. Do not use your hands to locate a leak.
- 10) Before the beginning of the snow season, inspect all areas where the Snowblower will be used and remove any object which may cause an accident and/or damage the equipment.
- 11) Never operate your Snowblower in poor visibility or without proper lighting conditions.

SAFETY IN OPERATION

- 1) Be sure there are no obstructions around the equipment and that no one stands near the equipment when in operation.
- 2) Do not operate an engine in a confined or non ventilated area.
- 3) Do not perform any adjustments, cleaning, maintenance or repairs with the engine running. The engine must be stopped and the P.T.O. disengaged. Preferably remove the key from the ignition.
- 4) Wear adequate clothing when working in cold or windy conditions.
- 5) Adjust skid shoes for proper ground clearance of scraper blade, especially in rough terrain or soft ground conditions.
- 6) Before operating, make sure the P.T.O. is properly installed and secured.
- 7) Before starting-up the Snowblower, make sure the auger and drum areas are free of ice.
- 8) Put P.T.O. control in neutral position before starting engine.
- 9) Keep hands, feet and clothing away from moving parts of the Snowblower. Stay away from the discharge chute.

SAFETY (cont'd)

2

- 10) Before unplugging the chute, always disengage the P.T.O., stop the engine and relieve all hydraulic pressures.
- 11) Do not operate in excessive inclined conditions. Be careful when turning in slopes.
- 12) Never operate your Snowblower with missing guards or without protective devices in place.
- 13) Do not operate your Snowblower near buildings, windows or other vehicles without prior and proper adjustment of the chute deflector.
- 14) Never aim discharge chute towards people or animals. This may cause serious injuries.
- 15) Always reduce operating speed in slippery conditions.
- 16) Be careful when backing-up, make sure you have good visibility.
- 17) Always be on the lookout for objects which may enter the Snowblower.
- 18) If undue vibrations are felt, disengage the P.T.O., stop the motor and look for the cause of the vibration. Vibration is usually the indication of a problem.
- 19) At the end of the operation, disengage the P.T.O., lower the Snowblower, put transmission in neutral, apply parking brake, stop engine and remove the key from the ignition.
- 2) Stop engine and relieve all hydraulic pressures before doing inspection, maintenance or repairs.
- 3) Never perform any work under the Snowblower while it is supported only by the tractor's hydraulic system. It must be completely supported by wooden blocks or other safe means.

SAFETY IN TRANSPORT

- 1) On public roads, use proper safety lights and check local regulations.
- 2) Be alert while driving on the road. Never carry passengers.
- 3) Always disengage P.T.O. while moving from one area of work to another.
- 4) It is recommended to use both brake pedals simultaneously for better control.
- 5) The recommended road speed should be such as to maintain full control over steering and braking.
- 6) Be careful while backing up, make sure you have good visibility.

SAFETY IN STORAGE

- 1) Provide adequate supports to prevent any accidental overturning of the Snowblower.
- 2) Do not let children play in the area where the snowblower is stored.

SAFETY WITH MAINTENANCE

- 1) Perform the Snowblower maintenance according to recommendations contained in this manual.

DECALS

SAFETY DECALS

The safety decals are affixed wherever special safety precautions are indicated. Locate them on the machine and read them carefully. If a decal is damaged, lost or illegible, install a new one. The following photos indicate where each one must be installed.

3

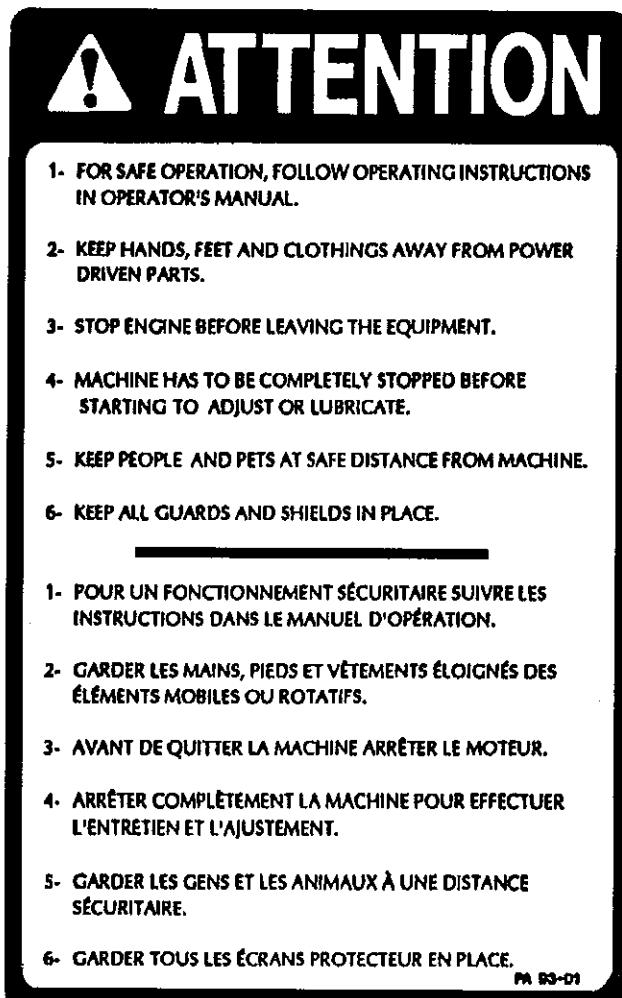


Figure 2
Decal A

Part no.: A102

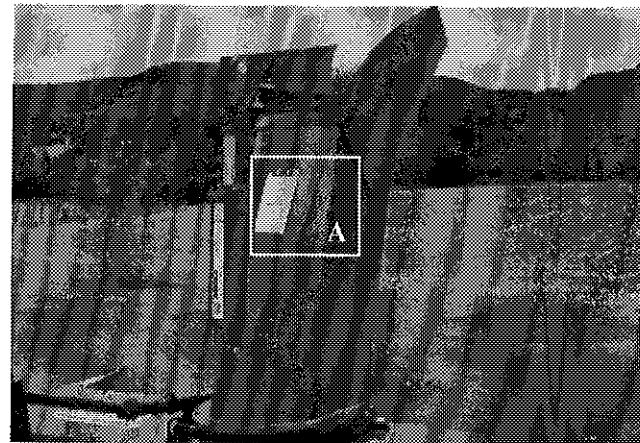


Figure 3

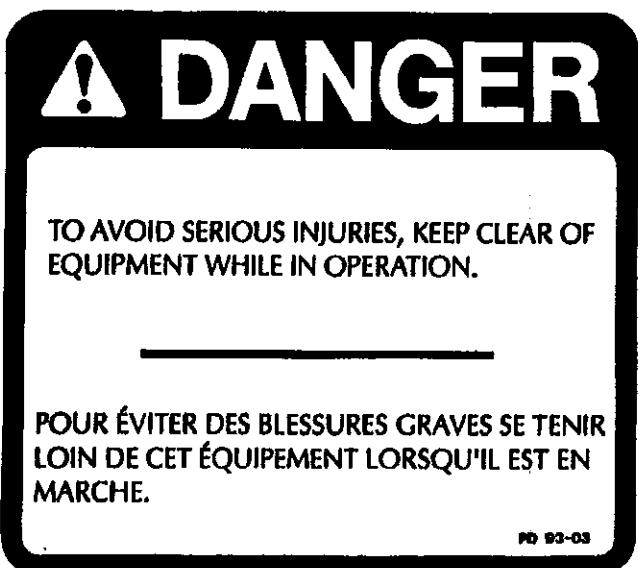


Figure 4
Decal B

Part no.: A101

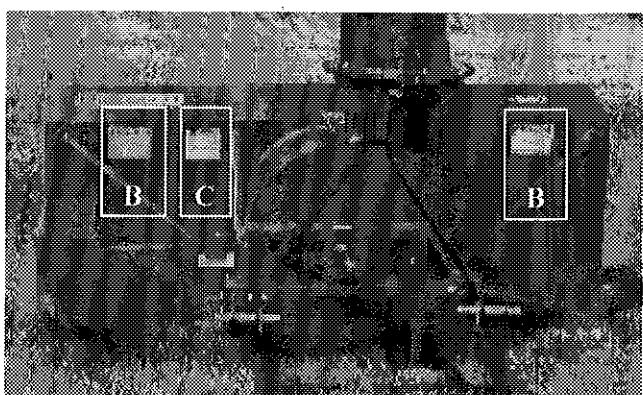


Figure 5

DECALS (cont'd)

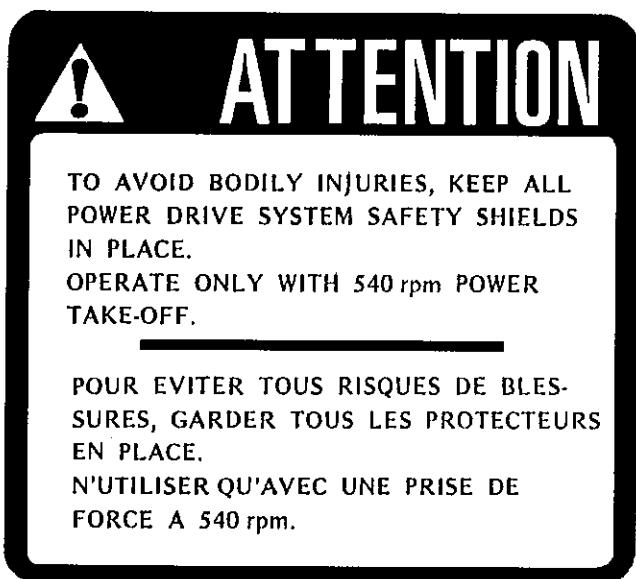


Figure 6
Decal C

Part no.: A107



Figure 7
Decal D

Part no.: A103



Figure 8

Decal E in Fig. 9 is located directly on the P.T.O. shaft. It is not visible when the safety shield is in place. It must never be visible when you operate the equipment.



Figure 9
Decal E

Part no.: A108

DECALS (cont'd)

3

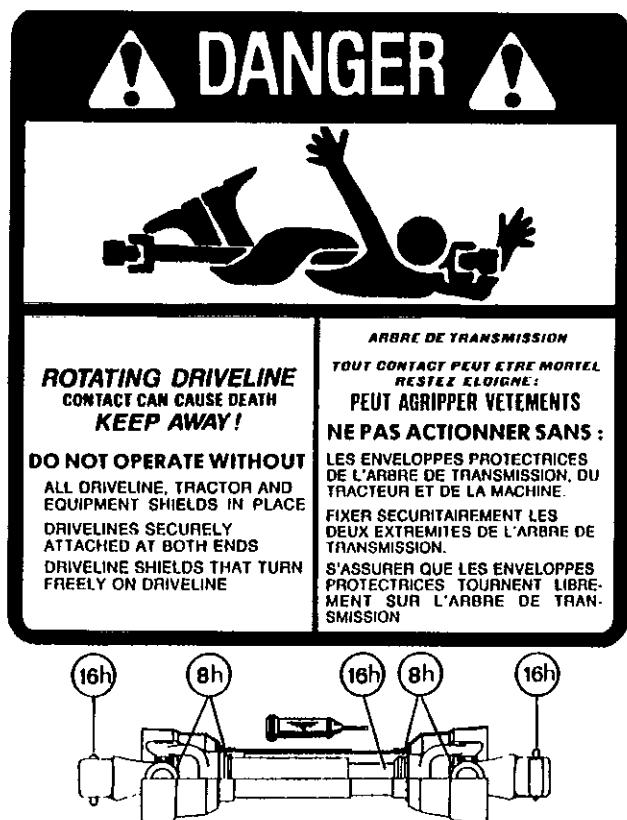


Figure 10

Decal F

Part no.: A 109

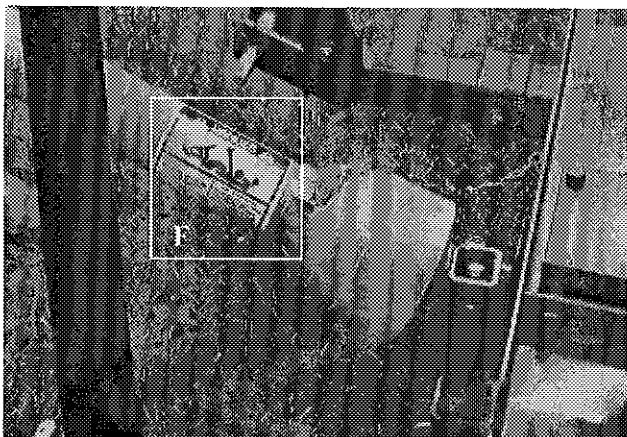


Figure 11

MAINTENANCE DECALS

The maintenance decals indicate the points requiring lubrication. Refer to maintenance section for more details.




Figure 12

Part no.: A 105



Figure 13

Part no.: A 106



Figure 14

Decal G

Part no.: A104

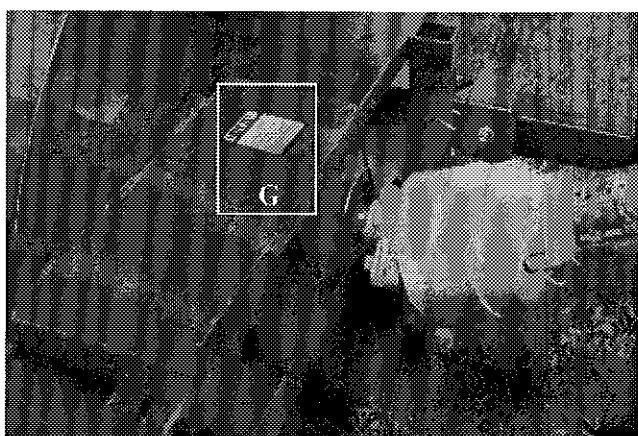


Figure 15

ASSEMBLY

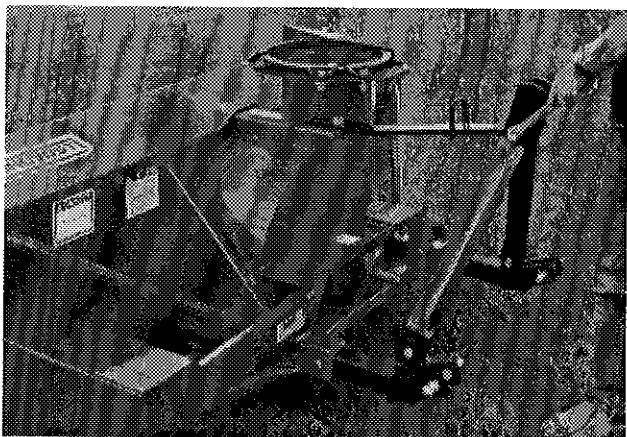


Figure 16

4



Figure 17



Figure 18

ASSEMBLY

- 1) The Snowblower is shipped partly assembled.
- 2) Install 3-point system according to the model of your Snowblower. (See section 10 for parts numbers). Use the holes most convenient to the type of tractor used (Fig. 16).
- 3) Install P.T.O. shaft with the shear pin end onto the Snowblower gear box (Fig. 17). Then attach safety shield support chain as shown (Fig. 18).
WARNING: The telescoping tubes of the drive shaft must never be allowed to bottom out while maintaining a minimum overlap of 6 inches.
- 4) If you install a hydraulic cylinder on the chute deflector, use model 25TR08 cylinder.
- 5) If equipped with a rotating drum, install a hydraulic cylinder model 25TR08.
- 6) Install the chute rotation mechanism.

STARTING-UP

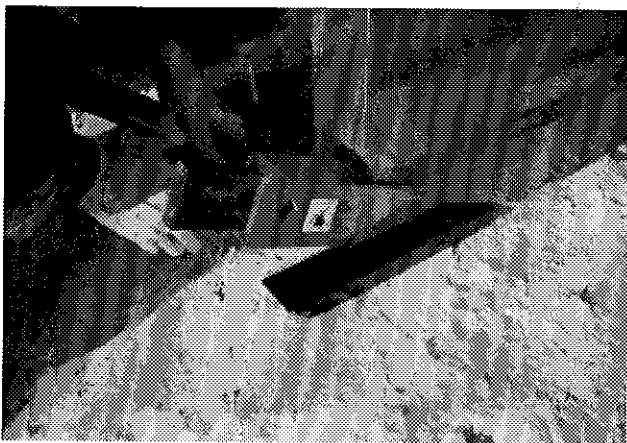


Figure 23

5

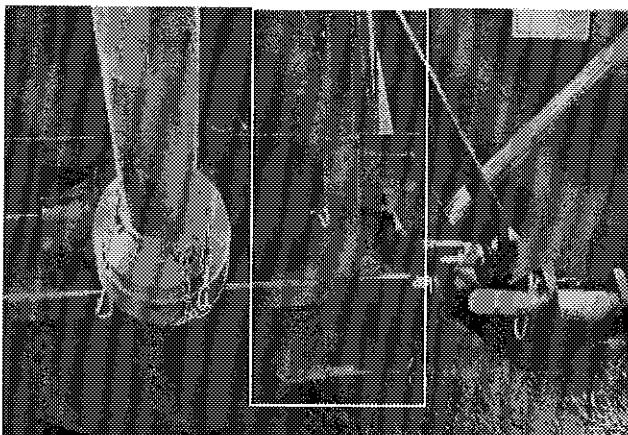


Figure 24

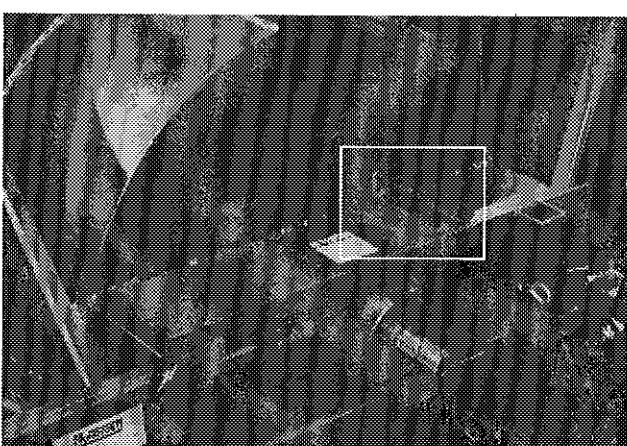



Figure 25

START-UP PROCEDURES

- 1) Check oil level in gearbox. Use S.A.E. W90 gear box oil.
- 2) Lubricate all points with a good quality multipurpose grease.
- 3) Check chain take-up adjustment. The spring maintaining the tension must be compressed to a length between 2 3/4" and 3 1/2".
- 4) Verify for adequate tightness of all fastening devices. Refer to torque chart on page 49.
- 5) Adjust skid shoes according to ground conditions (Fig. 23).
- 6) Following the installation of the Snowblower on the tractor, **do not forget** to lift the storage support (Fig. 24).
- 7) Make sure of a 540 RPM input to your snowblower.
- 8) Check impeller adjustment. The tip of the blades should be approximately 1/8" to 3/16" from the discharge wall of the drum. If necessary, adjust with the take-up screws provided (Fig. 25).

MAINTENANCE

- 1) Wipe off all grease fittings with a clean cloth before adding grease in order to avoid injecting dirt and sand.
- 2) Repair or replace damaged grease fittings.
- 3) Lubricate all grease fittings every 10 hours of operation.
- 4) Oil drive chain every 8 hours of operation.
- 5) Lubricate P.T.O. shaft as indicated below:

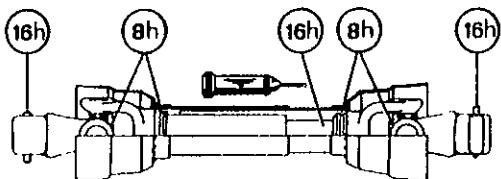

Pull out the P.T.O. and lubricate between the two tubes with low temperature grease.

- 6) Check oil level in gear box once a month. If necessary add oil.
- 7) Check tension of drive chain every 25 hours of operation and adjust if necessary.
- 8) Check for tightness of bearing collars every 50 hours of operation.
- 9) Change gearbox oil once a year. Use gear box oil S.A.E. W90 rated API, class GL-5.
- 10) Check all nuts and bolts once a year. If necessary use torque chart on page 49.
- 11) Standard scraper blades are reversible. Reverse when one edge is worn out.
- 12) Always use Grade 5 shear bolts.

STORAGE

- 1) Store the Snowblower in a cool, dry place.
- 2) Support the Snowblower with wooden blocks.
- 3) Keep all piston rods in the retracted position. This will assure better protection against the elements.
- 4) Clean your Snowblower.
- 5) Thoroughly inspect all parts of the Snowblower. Replace or repair worn or defective parts.
- 6) Touch-up or repaint if necessary.
- 7) Lubricate all points before storage.

TROUBLESHOOTING

P.T.O. SHAFT

PROBLEM	POSSIBLE CAUSE	CORRECTION
- Premature wear of U-joints and/or bluish color of cross journals.	<ul style="list-style-type: none"> - Insufficient lubrication. - Excessive working angle. 	<ul style="list-style-type: none"> - Follow lubrication recommendations. - Replace defective U-joints. - Make sure the snowblower inlet face is perpendicular to the ground and if possible readjust 3-point hitch in order to position the snowblower further away from tractor.
- Gripping or premature wear of telescoping members.	<ul style="list-style-type: none"> - Too much sliding under load. - Tube overlap too-short: minimum recommended is 6". - Insufficient lubrication. - Contaminants (sand, etc.). 	<ul style="list-style-type: none"> - Avoid raising snowblower while in operation. - Readjust 3-point hitch in order to position the snowblower closer to the tractor. - Follow lubrication recommendations. - Replace defective telescopic members.
- Damaged or jammed locking pin or bolt.	<ul style="list-style-type: none"> - Pin or orifice contaminated by sand, ice, etc. - Telescoping members too long, exerting pressure on locking device. 	<ul style="list-style-type: none"> - Clean and grease. - Readjust 3-point hitch in order to position the snowblower further away from tractor.
- Premature wear of guard tube bearing ring.	<ul style="list-style-type: none"> - Lack of lubrication. - Wrong installation of guard chain. - Part of the guard in contact with the equipment. 	<ul style="list-style-type: none"> - Follow lubrication instructions. - Adjust chain to prevent interference between guard & equipment. - Replace worn or damaged bearing rings.
- Cut or deformed safety guard tubes.	<ul style="list-style-type: none"> - Tubes in contact with the equipment. 	<ul style="list-style-type: none"> - Eliminate any interference between tubes and equipment or tractor. - Replace damaged tubes.

TROUBLESHOOTING (cont'd)

SNOWBLOWER


PROBLEM	POSSIBLE CAUSE	CORRECTION
- The snow is not being thrown as far as usual.	- Tractor RPM too low. - Gap too wide between impeller blade tip and drum outlet wall. - Insufficient tractor HP.	- Raise P.T.O. speed to a minimum of 540 RPM. - Adjust impeller blades closer to drum outlet (1/8" to 3/16"). - Reduce travel speed.
- Frequent plugging of discharge chute.	- Tractor RPM too low. - Tractor RPM reduced too early with snow still in the snowblower. - Slippage of PTO clutch mechanism. - Wet snow condition.	- Raise P.T.O. speed to a minimum of 540 RPM. - Make sure the snowblower is completely empty before reducing RPM, especially on tractors with foot controlled RPM. - Repare clutch. - Reduce travel speed.
- The impeller will not turn.	- Shear bolt broken on drive shaft.	- Replace shear bolt.
- The auger will not turn.	- Shear bolt broken on drive shaft. - Shear bolt broken on auger drive shaft. - Broken drive chain.	- Replace shear bolt. - Replace shear bolt. - Fix or replace chain.
- The rotating drum will not turn.	- Rotating drum shear bolt broken. - Ice accumulation. - Wrong hydraulic connections.	- Replace shear bolt. - Remove ice. - Check hydraulic connections.
- The chute will not turn.	- Ice accumulation. - Wrong hydraulic connections.	- Remove ice. - Check hydraulic connections.

SPECIFICATIONS

Snowblower model		P-740	P-740 TRC	P-800	P-800 TRC	P-860	P-860 TRC	P-862	P-862 TRC	P-920	P-920 TRC	P-920 -98	P-920 -98TRC
Horse power recommended (min - max)		30-50	30-50	40-65	40-65	50-75	50-75	50-75	50-75	75-100	75-100	75-100	75-100
Working width (inches) (centimeters)		74" 188	74" 188	80" 203	80" 203	86" 218	86" 218	86" 218	86" 218	92" 234	92" 234	98" 249	98" 249
Cutting height (inches) (centimeters)		35" 89	35" 89	35" 89	35" 89	37" 94	37" 94	43" 109	43" 109	37" 94	37" 94	37" 94	37" 94
Impeller diameter (inches) (centimeters)		26" 66	26" 66	26" 66	26" 66	28" 71	28" 71	28" 71	28" 71	30" 76	30" 76	30" 76	30" 76
Depth of drum (inches) (centimeters)		12" 30.5											
Impeller blades		4	4	4	4	4	4	4	4	5	5	5	5
Size of impeller shaft (inches) (centimeters)		1 9/16" 3.97	2" 5.08	2" 5.08	2" 5.08	2" 5.08							
Height - Impeller center (inches) (centimeters)		16 1/2" 41.9	16 1/2" 41.9	16 1/2" 41.9	16 1/2" 41.9	17 1/2" 44.5	17 1/2" 44.5	17 1/2" 44.5	17 1/2" 44.5	18 1/2" 47.0	18 1/2" 47.0	18 1/2" 47.0	18 1/2" 47.0
Impeller RPM		540	540	540	540	540	540	540	540	540	540	540	540
Number of augers		1	1	1	1	1	1	2	2	1	1	1	1
Main auger diameter (inches) (centimeters)		23" 58											
Upper auger 13"/33 cm diameter		-	-	-	-	-	-	Std.	Std.	-	-	-	-
Drive chain - main auger		80	80	80	80	80	80	80	80	80	80	80	80
Oil bath sealed gear box		Std.											
Choice of chute rotation mechanism	Manual	Avail.	-										
	Hyd. cylinder	-	-	-	-	-	-	-	-	-	-	-	-
	Hyd. motor	Avail.											
Number of shear bolt		2	3	2	3	2	3	2	3	2	3	2	3
Hitch category		1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	2	2	2	2
Balanced impeller		Std.											
Balanced auger		Std.											
Drum rotation mechanism	Hyd. cylinder	-	Std.										
	Hyd. motor	-	-	-	-	-	-	-	-	-	-	-	-
1000 to 540 RPM reducer		-	-	-	-	-	-	-	-	Opt.	Opt.	Opt.	Opt.
Scraper blades	Std. steel - not rev.	-	-	-	-	-	-	-	-	-	-	-	-
	Std. steel - rever.	Std.											
	Hd. steel 3/8"x2 1/2"	-	-	-	-	-	-	-	-	-	-	-	-
	Hd. steel 1/2" x 4"	Opt.											
	Hd. steel 1/2" x 6"	Opt.											
Adjustable skid shoes	Standard steel	Std.											
	CHT-360 steel	Opt.											
Full flight auger (industrial)		Opt.											
Semi-industrial chute		Opt.											
Industrial chute		Opt.											
24" or 48" (61-122cm) chute extension		Opt.											
Hydraulic telescopic industrial chute		-	-	-	-	-	-	-	-	-	-	-	-
Deflector manual or hydraulic		Avail.											
Bearing / ductile iron casting		Std.											
Lateral blades		Opt.											
P.T.O. (standard)		No. 5	No. 5	No. 5	No. 5	No. 6	No. 6	No. 6	No. 6	No. 8	No. 8	No. 8	No. 8
P.T.O. (optional)		-	-	-	-	-	-	-	-	No. 9	No. 9	No. 9	No. 9
Weight (approx.) (lbs)		1160	1330	1202	1372	1259	1432	1440	1609	1650	1800	1700	1850
(kg)		522	599	541	617	567	644	648	724	748	816	771	839

Specifications subject to change without notice.

SNOWBLOWERS P-740 P-800 P-860

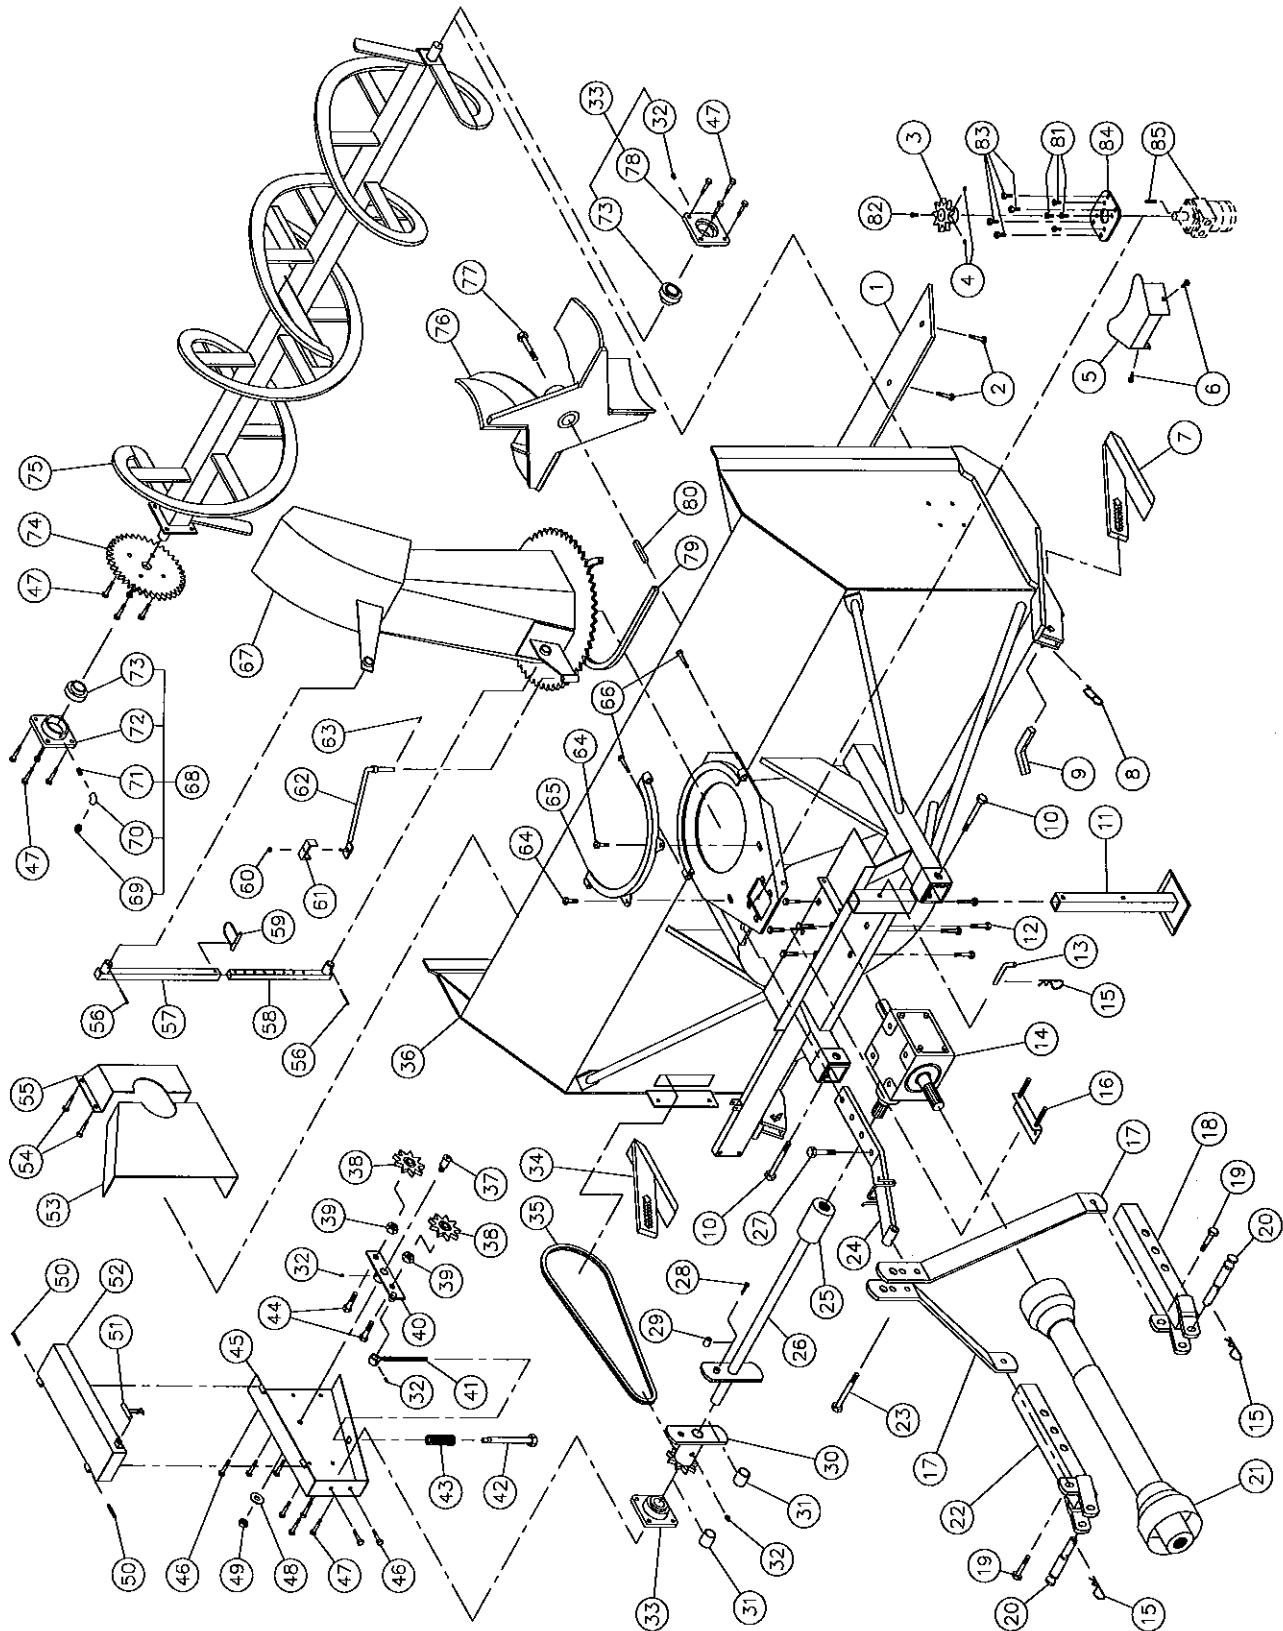


SNOWBLOWERS P-740 P-800 P-860 (cont'd)

REF.	PART #	DESCRIPTION	QTY		
			P-740	P-800	P-860
1	140-00921	Reversible scraper blade 3/8" x 4" x 67½" lg	1	-	-
1	140-00931	Reversible scraper blade 3/8" x 4" x 73½" lg	-	1	-
1	140-00911	Reversible scraper blade 3/8" x 4" x 79½" lg	-	-	1
2	125-0715	Plow bolt 7/16" x 1½" lg + nut & lock washer	7	8	8
3	110-04182	Sprocket 9 tooth		opt. opt. opt.	
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)		opt. opt. opt.	
5	130-08161	Guard		opt. opt. opt.	
6	Std.	Boulon 7/16" NC x 1 1/4" lg + écrou à blocage de nylon + rondelle plate (2)		opt. opt. opt.	
7	110-05491	Skid shoe (right side)	1	1	1
8	8297	Safety square pin 3.5 mm x 84 mm	2	2	2
9	140-01861	Skid shoes lock	2	2	2
10	Std.	Bolt 5/8" NC x 5" lg + nylon lock nut	2	2	2
11	8219	Storage support	1	1	1
12	Std.	Bolt ½" NC x 1" lg +lock washer + 6 flat washers	8	8	8
13	8220	Storage support pin	1	1	1
14	8251	Gear box T27D	1	1	1
15	Std.	Hitch pin clip 5/32"	3	3	3
16	8199	Adjustment plate for gear box + 4 nuts 1/2" NC	1	1	1
17	8005	3-points side bar	2	2	-
17	8036	3-points side bar	-	-	2
18	8936	Right lower hitch	1	1	1
19	Std.	Bolt 5/8" NC x 2" lg + nulon lock nut	2	2	2
20	8004	Pin category 1 & 2	2	2	2
21	8114	P.T.O. shaft	1	1	-
21	8202	P.T.O. shaft	-	-	1
22	8935	Left lower hitch	1	1	1
23	Std.	Bolt 3/4" NF x 4½" lg grade 8 + nylon lock nut	1	1	1
24	8016	Upper hitch	1	1	-
24	8182	Upper hitch	-	-	1
25	6466	Splined adaptor 1¼"-19 (welded)	1	1	1
26	110-05631	Auger drive shaft 26 7/16" lg overall (includes no. 25 and 29)	1	-	-
26	110-05641	Auger drive shaft 29 7/16" lg overall (includes no. 25 and 29)	-	1	-
26	110-05651	Auger drive shaft 32 7/16" lg overall (includes no. 25 and 29)	-	-	1
27	Std.	Bolt 3/4" NC x 3" lg + nylon lock nut	1	1	1
28	Std.	Bolt 1/4" NC x 2" lg grade 5+ nylon lock nut	1	1	1
29	150-01491	Bushing ¼" i.d. x 7/8" o.d. x ¾" lg (welded)	2	2	2
30	8184	Sprocket #80 + shearplate (includes no. 31)	1	1	1
31	8009	Brass bushing 1½" i.d. x 1½" o.d. x 1 3/16" lg	2	2	2
32	Std.	Grease fitting ¼"-28 straight	5	5	5
33	8011	Bearing 1¼" + flange	2	2	2
34	110-03151	Skid shoe (left side)	1	1	1
35	190-01441	Chain #80 x 78" lg	1	1	1
35	26A80	Connecting link #80	1	1	1
35	59-80	Offset link	1	1	1
36	---	Frame P-740	1	-	-
36	---	Frame P-800	-	1	-
36	---	Frame P-860	-	-	1
37	150-00381	Idler clevis pin	1	1	1
38	9287	Idler sprocket #80 (steel)	2	2	2
39	Std.	Nut 7/8" NC	2	2	2
40	110-01211	Idler	1	1	1

SNOWBLOWERS P-740 P-800 P-860 (cont'd)

REF.	PART #	DESCRIPTION	QTY	P-740	P-800	P-860
41	110-01231	Threaded rod for idler adjustment + nut 7/16" NC	1	1	1	1
42	110-01221	Threaded tube for idler adjustment	1	1	1	1
43	9473	Compression spring	1	1	1	1
44	Std.	Bolt 3/4" NC x 2 1/2" lg + écrou à blocage de nylon	2	2	2	2
45	110-01851	Chain guard	1	1	1	1
46	Std.	Bolt 7/16" NC x 1" lg + nylon lock nut	5	5	5	5
47	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon lock nut	16	16	16	16
48	Std.	Flat washer 5/8"	1	1	1	1
49	346-44500	Nylon locknut 5/8" NC thin	1	1	1	1
50	Std.	Roll pin 5/16" x 2" lg	2	2	2	2
51	8125	Rubber fastener	1	1	1	1
52	110-01271	Chain guard cover	1	1	1	1
53	130-02001	Inside guard (welded)	1	1	1	1
54	Std.	Bolt 3/8" NC x 1" lg + nylon lock nut	4	4	4	4
55	8018	Inside guard (bolted)	1	1	1	1
56	Std.	2 hairpin cotter 5/32" x 2" lg	opt.	opt.	opt.	opt.
57	8146	Chute adjusting tube	opt.	opt.	opt.	opt.
58	8145	Chute adjusting rod	opt.	opt.	opt.	opt.
59	8112	Lock pin 1/4"	opt.	opt.	opt.	opt.
60	Std.	Nylon locknut 5/16" NC	opt.	opt.	opt.	opt.
61	140-00881	Hoses mounting plate	opt.	opt.	opt.	opt.
62	110-01111	Mounting support plate	opt.	opt.	opt.	opt.
63	Std.	Cotter pin 1/8" x 1"	opt.	opt.	opt.	opt.
64	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2	2	2	2
65	110-01341	Retaining bracket	1	1	1	1
66	Std.	Bolt 7/16" NC x 3" lg + nylon locknut	2	2	2	2
67	120-00731	Chute	1	1	1	1
68	8011-C	Bearing 1 1/4" + flange + elbow grease fitting	1	1	1	1
69	Std.	Grease fitting 1/8"-NPT straight	1	1	1	1
70	8226	Elbow 90° 1/8"-NPT	1	1	1	1
71	8227	Straight joint 1/8"-NPT	1	1	1	1
72	8166-M	Modified flange	1	1	1	1
73	8165	Bearing 1 1/4" UC207-20	3	3	3	3
74	8185	Sprocket 80A30 T 1 1/4" Ø	1	1	1	1
75	8023	Auger P-740	1	-	-	-
75	8024	Auger P-800	-	1	-	-
75	8025	Auger P-860	-	-	1	1
76	110-01871	Impeller 26" Ø 4 blades	1	1	-	-
76	110-01881	Impeller 28" Ø 4 blades	-	-	1	1
77	Std.	Impeller cap screw 5/8" NC x 2" (ass. with lock-tite 242) + lock washer	1	1	1	1
78	8166	Flange F207	2	2	2	2
79	8149	U-shaped UHMW ± 14" i. d.	1	1	1	1
80	8030	Square key 3/8" x 3/8" x 3 1/2" lg	1	1	1	1
81	Std.	Bolt 3/8" NC x 1" lg + rondelle de blocage (4)	opt.	opt.	opt.	opt.
82	Std.	Bolt 1/4" NC x 3/4" lg + lock washer	opt.	opt.	opt.	opt.
83	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)	opt.	opt.	opt.	opt.
84	130-08151	Orbit motor support	opt.	opt.	opt.	opt.
85	---	Hydraulic orbit motor	opt.	opt.	opt.	opt.

SNOWBLOWERS P-740TRC P-800TRC P-860TRC

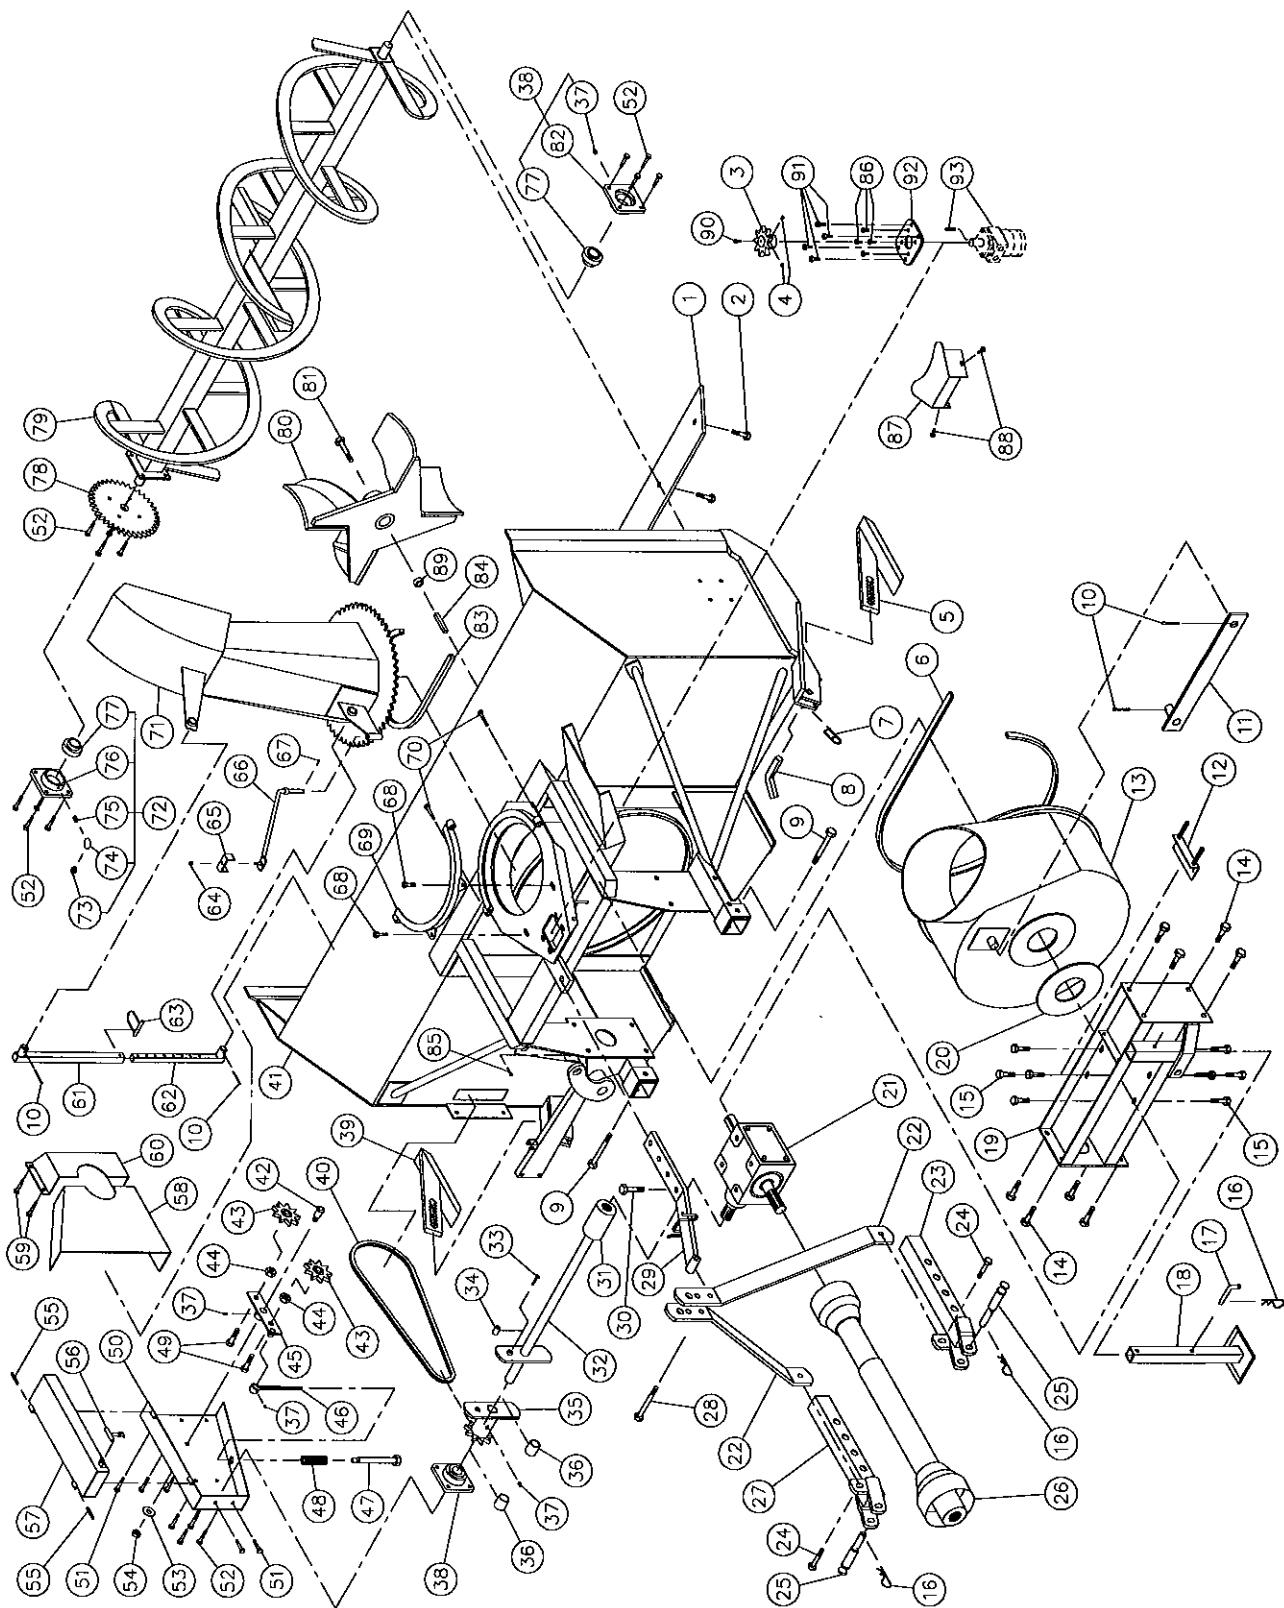


SNOWBLOWERS P-740TRC P-800TRC P-860TRC (cont'd)

REF.	PART #	DESCRIPTION	QTY	P-740TRC	P-800TRC	P-860TRC
1	140-00921	Reversible scraper blade 3/8" x 4" x 67½" lg	-	-	-	-
1	140-00931	Reversible scraper blade 3/8" x 4" x 73½" lg	-	1	-	-
1	140-00911	Reversible scraper blade 3/8" x 4" x 79½" lg	-	-	1	-
2	125-0715	Plow bolt 7/16" NC x 1½" lg + nut & lock washer	7	8	8	-
3	110-04182	Sprocket 9 tooth	-	opt.	opt.	opt.
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)	-	opt.	opt.	opt.
5	110-05491	Skid shoe (right side)	1	1	1	-
6	8195	U-shaped UHMW 3/8" x 7/8" x 84 5/8" lg	1	1	-	-
6	8196	U-shaped UHMW 3/8" x 7/8" x 91" lg	-	-	1	-
7	8297	Safety square pin 3.5 mm x 84 mm	2	2	2	-
8	140-01861	Skid shoes lock	2	2	2	-
9	Std.	Bolt 5/8" NF x 5" lg + nylon lock nut	2	2	2	-
10	Std.	Cotter pin 5/32" x 2" lg	4	4	4	-
11	8037	Connecting rod ½" x 2" x 21" lg	1	1	-	-
11	8229	Connecting rod ½" x 2" x 22" lg	-	-	1	-
12	8199	Adjustment plate for gear box + 4 nuts ½" NC	1	1	1	-
13	8197	Rotary drum 26" Ø	1	1	1	-
13	8198	Rotary drum 28" Ø	1	1	-	-
14	Std.	Bolt 5/8" NC x 1½" lg + nylon lock nut	8	8	8	-
15	Std.	Bolt ½" NC x 1" lg + lockwasher + 6 flat washers	8	8	8	-
16	Std.	Hitch pin clip 5/32"	3	3	3	-
17	8220	Storage support pin	1	1	1	-
18	8219	Storage support	1	1	1	-
19	8230	Gear box support	1	1	-	-
19	8231	Gear box support	-	-	1	-
20	8232	UHMW flat washer 3/16" x 4 5/8" i.d. x 8 1/8" o.d.	1	1	1	-
21	8251	Gear box T-27D	1	1	1	-
22	8036	3-points side bar	2	2	-	-
22	8180	3-points side bar	-	-	2	-
23	8936	Right lower hitch	1	1	1	-
24	Std.	Bolt 5/8" NC x 2" lg + nylon lock nut	2	2	2	-
25	8004	Pin category 1 & 2	2	2	2	-
26	8114	P.T.O. shaft	1	1	-	-
26	8202	P.T.O. shaft	-	-	1	-
27	8935	Left lower hitch	1	1	1	-
28	Std.	Bolt 3/4" NF x 4 1/2" lg grade 8 + nylon lock nut	1	1	1	-
29	8042	Upper hitch	1	1	-	-
29	8233	Upper hitch	-	-	1	-
30	Std.	Bolt 3/4" NC x 3" lg + nylon lock nut	1	1	1	-
31	6466	Splined adaptor 1 ¼" - 19 (welded)	1	1	1	-
32	110-05631	Auger drive shaft 26 7/16" lg overall (includes no. 31 and 34)	1	-	-	-
32	110-05641	Auger drive shaft 29 7/16" lg overall (includes no. 31 and 34)	-	1	-	-
32	110-05651	Auger drive shaft 32 7/16" lg overall (includes no. 31 and 34)	-	-	1	-
33	Std.	Bolt 1/4" NC x 2" lg grade 5 + nylon lock nut	1	1	1	-
34	150-01491	Bushing 1/4" i.d. x 7/8" o.d. x 3/4" lg (welded)	2	2	2	-
35	8184	Sprocket #80 + shearplate (includes no. 36)	1	1	1	-
36	8009	Brass bushing 1 1/4" i.d. x 1 1/2" o.d. x 1 3/16" lg	2	2	2	-
37	Std.	Grease fitting 1/4"-28 straight	5	5	5	-
38	8011	Bearing 1 1/4" + flange	2	2	2	-
39	110-03151	Skid shoe (left side)	1	1	1	-
40	190-01441	Chain #80 x 78" lg	1	1	1	-
40	26A80	Connecting link #80	1	1	1	-
40	59-80	Offset link #80	1	1	1	-
41	---	Frame P-740TRC	1	-	-	-
41	---	Frame P-800TRC	-	1	-	-
41	---	Frame P-860TRC	-	-	1	-

SNOWBLOWERS P-740TRC P-800TRC P-860TRC (cont'd)

REF.	PART #	DESCRIPTION	P-740TRC	P-800TRC	QTY	P-860TRC
42	150-00381	Idler clevis pin		1	1	1
43	9287	Idler sprocket #80	2	2	2	
44	Std.	Nut 7/8" NC	2	2	2	
45	110-01211	Idler	1	1	1	
46	110-01231	Threaded rod for idler adjustment + nut 7/16" NC	1	1	1	
47	110-01221	Threaded tube for idler adjustment	1	1	1	
48	9473	Compression spring	1	1	1	
49	Std.	Bolt 3/4" NC x 2 1/2" lg + écrou à blocage de nylon	2	2	2	
50	110-01851	Chain guard	1	1	1	
51	Std.	Bolt 7/16" NC x 1" lg + nylon lock nut	5	5	5	
52	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon lock nut	16	16	16	
53	Std.	Flat washer 5/8"	1	1	1	
54	346-44500	Nylon locknut 5/8" NC thin	1	1	1	
55	Std.	Roll pin 5/16" x 2" lg	2	2	2	
56	8125	Rubber fastener	1	1	1	
57	110-01271	Chain guard cover	1	1	1	
58	130-02001	Inside guard (welded)	1	1	1	
59	Std.	Bolt 3/8" NC x 1" lg + nylon locknut	4	4	4	
60	8018	Inside guard (bolted)	1	1	1	
61	8146	Chute adjusting tube	opt.	opt.	opt.	
62	8145	Chute adjusting rod	opt.	opt.	opt.	
63	8112	Lock pin 1/4"	opt.	opt.	opt.	
64	Std.	Nylon locknut 5/16" NC	opt.	opt.	opt.	
65	140-00881	Hoses mounting plate	opt.	opt.	opt.	
66	110-01111	Mounting support plate	opt.	opt.	opt.	
67	Std.	Cotter pin 1/8" x 1"	opt.	opt.	opt.	
68	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2	2	2	
69	110-01341	Retaining bracket	1	1	1	
70	Std.	Bolt 7/16" NC x 3" lg + nylon locknut	2	2	2	
71	110-00731	Chute	1	1	1	
72	8011-C	Bearing 1 1/4" + flange	1	1	1	
73	Std.	Grease fitting 1/8"-NPT straight	1	1	1	
74	8226	Elbow 90° 1/8"-NPT	1	1	1	
75	8227	Straight joint 1/8"-NPT	1	1	1	
76	8166-M	Modified flange	1	1	1	
77	8165	Bearing 1 1/4"	3	3	3	
78	8185	Sprocket 80A30 T 1 1/4" ø	1	1	1	
79	8023	Auger P-740	1	-	-	
79	8024	Auger P-800	-	1	-	
79	8025	Auger P-860	-	-	1	
80	110-01871	Impeller 26" ø 4 blades	1	1	-	
80	110-01881	Impeller 28" ø 4 blades	-	-	1	
81	Std.	Impeller cap screw 5/8" NC x 1 1/2" lg (ass. with lock-tite 242) + lock washer	1	1	1	
82	8166	Flange F207	2	2	2	
83	8149	U-shaped UHMW ± 14" i. d.	1	1	1	
84	8030	Square key 3/8" x 3/8" x 3 1/2" lg	1	1	1	
85	Std.	Rotary drum safety shear bolt 3/8" NC x 2" lg + nylon locknut	1	1	1	
86	Std.	Bolt 3/8" NC x 1" lg + lock washer	opt.	opt.	opt.	
87	130-08161	Guard	opt.	opt.	opt.	
88	Std.	Bolt 7/16" NC x 1 1/4" lg + nylon locknut & flat washer (2)	opt.	opt.	opt.	
89	8298	Spacer 3/4" i.d. x 1 1/4" o.d. x 9/16" lg	1	1	1	
90	Std.	Bolt 1/4" NC x 3/4" lg + lock washer	opt.	opt.	opt.	
91	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)	opt.	opt.	opt.	
92	130-08151	Orbit motor support	opt.	opt.	opt.	
93	---	Hydraulic orbit motor	opt.	opt.	opt.	

SNOWBLOWER P-862

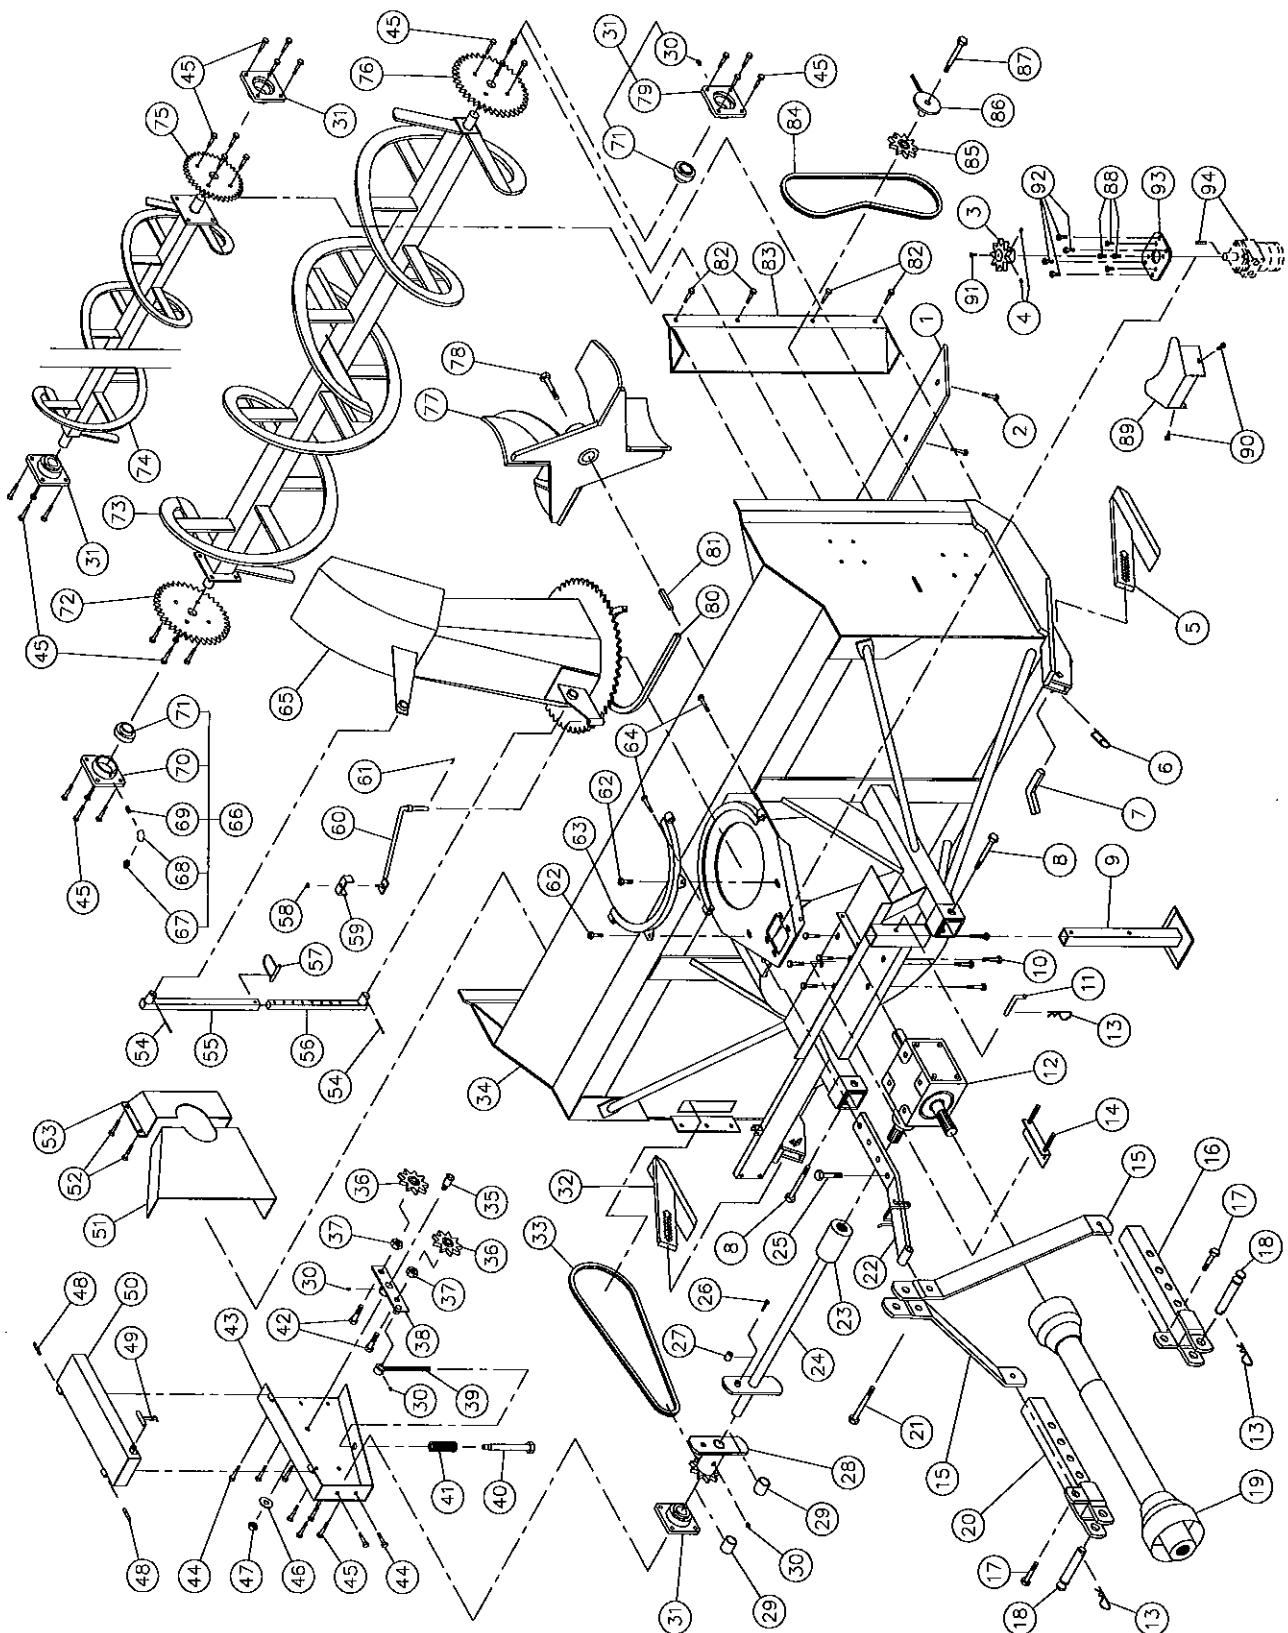


SNOWBLOWER P-862 (cont'd)

REF.	PART #	DESCRIPTION	QTY
1	140-00911	Reversible scraper blade 3/8" x 4" x 7 1/2" lg	1
2	125-0715	Plow bolt 7/16" NC x 1 1/2" lg + nut & lock washer.....	8
3	110-04182	Sprocket 9 tooth	opt.
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)	opt.
5	110-05491	Skid shoe (right side)	1
6	8297	Safety square pin 3.5 mm x 84 mm	2
7	140-01861	Skid shoes lock	2
8	Std.	Bolt 5/8" NF x 5" lg + nylon locknut	2
9	8219	Storage support	1
10	Std.	Bolt 1/2" NC x 1" lg +lock washer + 6 flat washers	8
11	8220	Storage support pin	1
12	8251	Gear box	1
13	Std.	Hitch pin clip 5/32"	3
14	110-02081	Adjustment plate for gear box + 4 nuts 1/2" NC	1
15	8036	3-points side bar	2
16	8936	Right lower hitch	1
17	Std.	Bolt 5/8" NC x 2" lg + nylon locknut	2
18	8004	Pin category 1 & 2	2
19	8202	P.T.O. shaft	1
20	8935	Left lower hitch	1
21	Std.	Bolt 3/4" NF x 4 1/2" lg grade 8 + nylon locknut	1
22	8182	Upper hitch	1
23	6466	Splined adaptor 1 1/4" - 19 (welded)	1
24	110-05651	Auger drive shaft 32 7/16" lg overall (includes no. 23 and 27)	1
25	Std.	Bolt 3/4" NC x 2 1/2" lg + nylon locknut	1
26	Std.	Bolt 1/4" NC x 2" lg grade 5 + nylon locknut	1
27	150-01491	Bushing 1/4" i.d. x 7/8" o.d. x 3/4" lg (welded)	2
28	8184	Sprocket #80 + shearplate (includes no. 29)	1
29	8009	Brass bushing 1 1/4" i.d. x 1 1/2" o.d. x 1 3/16" lg	2
30	Std.	Grease fitting 1/4"-28 straight	5
31	8011	Bearing 1 1/4" + flange	4
32	110-03151	Skid shoe (left side)	1
33	190-01441	Chain # 80 x 78" lg	1
33	26A80	Connecting link #80	1
33	59-80	Offset link #80	1
34	- - -	Frame P-862	1
35	150-00381	Idler clevis pin	1
36	9287	Idler sprocket #80	2
37	Std.	Nut 7/8" NC	2
38	110-01211	Idler	1
39	110-01231	Threaded rod for idler adjustment + nut 7/16" NC	1
40	110-01221	Threaded tube for idler adjustment	1
41	9473	Compression spring	1
42	Std.	Bolt 3/4" NC x 2 1/2" lg + nylon locknut	2
43	110-01851	Chain guard	1
44	Std.	Bolt 7/16" NC x 1" lg + nylon locknut	5
45	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut	32
46	Std.	Flat washer 5/8"	1
47	346-44500	Nylon locknut 5/8" NC thin	1
48	Std.	Goupille à ressort 5/16" x 2" lg	2
49	8125	Rubber fastener	1

SNOWBLOWER P-862 (cont'd)

REF.	PART #	DESCRIPTION	QTY
50	110-01271	Chain guard cover	1
51	130-02001	Inside guard (welded)	1
52	Std.	Bolt 3/8" NC x 1" lg + nylon locknut	4
53	8018	Inside guard (bolted)	1
54	Std.	2 hairpin cotter 5/32" x 2" lg	opt.
55	8146	Chute adjusting tube	opt.
56	8145	Chute adjusting rod	opt.
57	8112	Lock pin 1/4"	opt.
58	Std.	Nylon locknut 5/16"	opt.
59	140-00881	Hoses mounting plate	opt.
60	110-01111	Mounting support plate	opt.
61	Std.	Cotter pin 1/8" x 1"	opt.
62	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2
63	110-01341	Retaining bracket	1
64	Std.	Bolt 7/16" NC x 3"lg + nylon locknut	2
65	120-00731	Chute	1
66	8011-C	Bearing 1 1/4" + flange + elbow grease fitting	1
67	Std.	Grease fitting 1/8"-NPT straight	1
68	8226	Elbow 90° 1/8"-NPT	1
69	8227	Straight joint 1/8"-NPT	1
70	8166-M	Modified flange F207	1
71	8165	Bearing 1 1/4" UC207-20	5
72	8185	Roue à dents 80A30 T 1 1/4" ø	1
73	8139	Lower auger P-862	1
74	8134	Upper auger P-862	1
75	8144	Sprocket 60A30 T 1 1/4" ø	1
76	8021	Sprocket 60A38 T 1 1/4" ø	1
77	110-01881	Impeller 28" ø 4 blades	1
78	Std.	Impeller cap screw 5/8" NC x 2" lg (ass. with lock-tite 242) + lock washer	1
79	8166	Flange F207	4
80	8149	U-shaped UHMW ± 14" i. d.	1
81	8030	Square key 3/8" x 3/8" x 3 1/2" lg	1
82	Std.	Bolt 7/16" NC x 1" lg + nylon locknut	4
83	8135	Drive chain guard (upper auger)	1
84	190-01301	Chain #60 x 64" lg	1
85	8186	Idler sprocket #60	1
86	8136	Idler for upper auger (hole 1/2") + 2 nuts 1/2" NC	1
87	Std.	Bolt 1/2" NC x 3 1/2" lg + nylon locknut & flat washer	1
88	Std.	Bolt 3/8" NC x 1" lg + lock washer (4)	opt.
89	130-08161	Guard	opt.
90	Std.	Bolt 7/16" NC x 1 1/4" lg + nylon locknut + flat washer (2)	opt.
91	Std.	Bolt 1/4" NC x 3/4" lg + lock washer	opt.
92	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)	opt.
93	130-08151	Orbit motor support	opt.
94	---	Hydraulic orbit motor	opt.

SNOWBLOWER P-862TRC

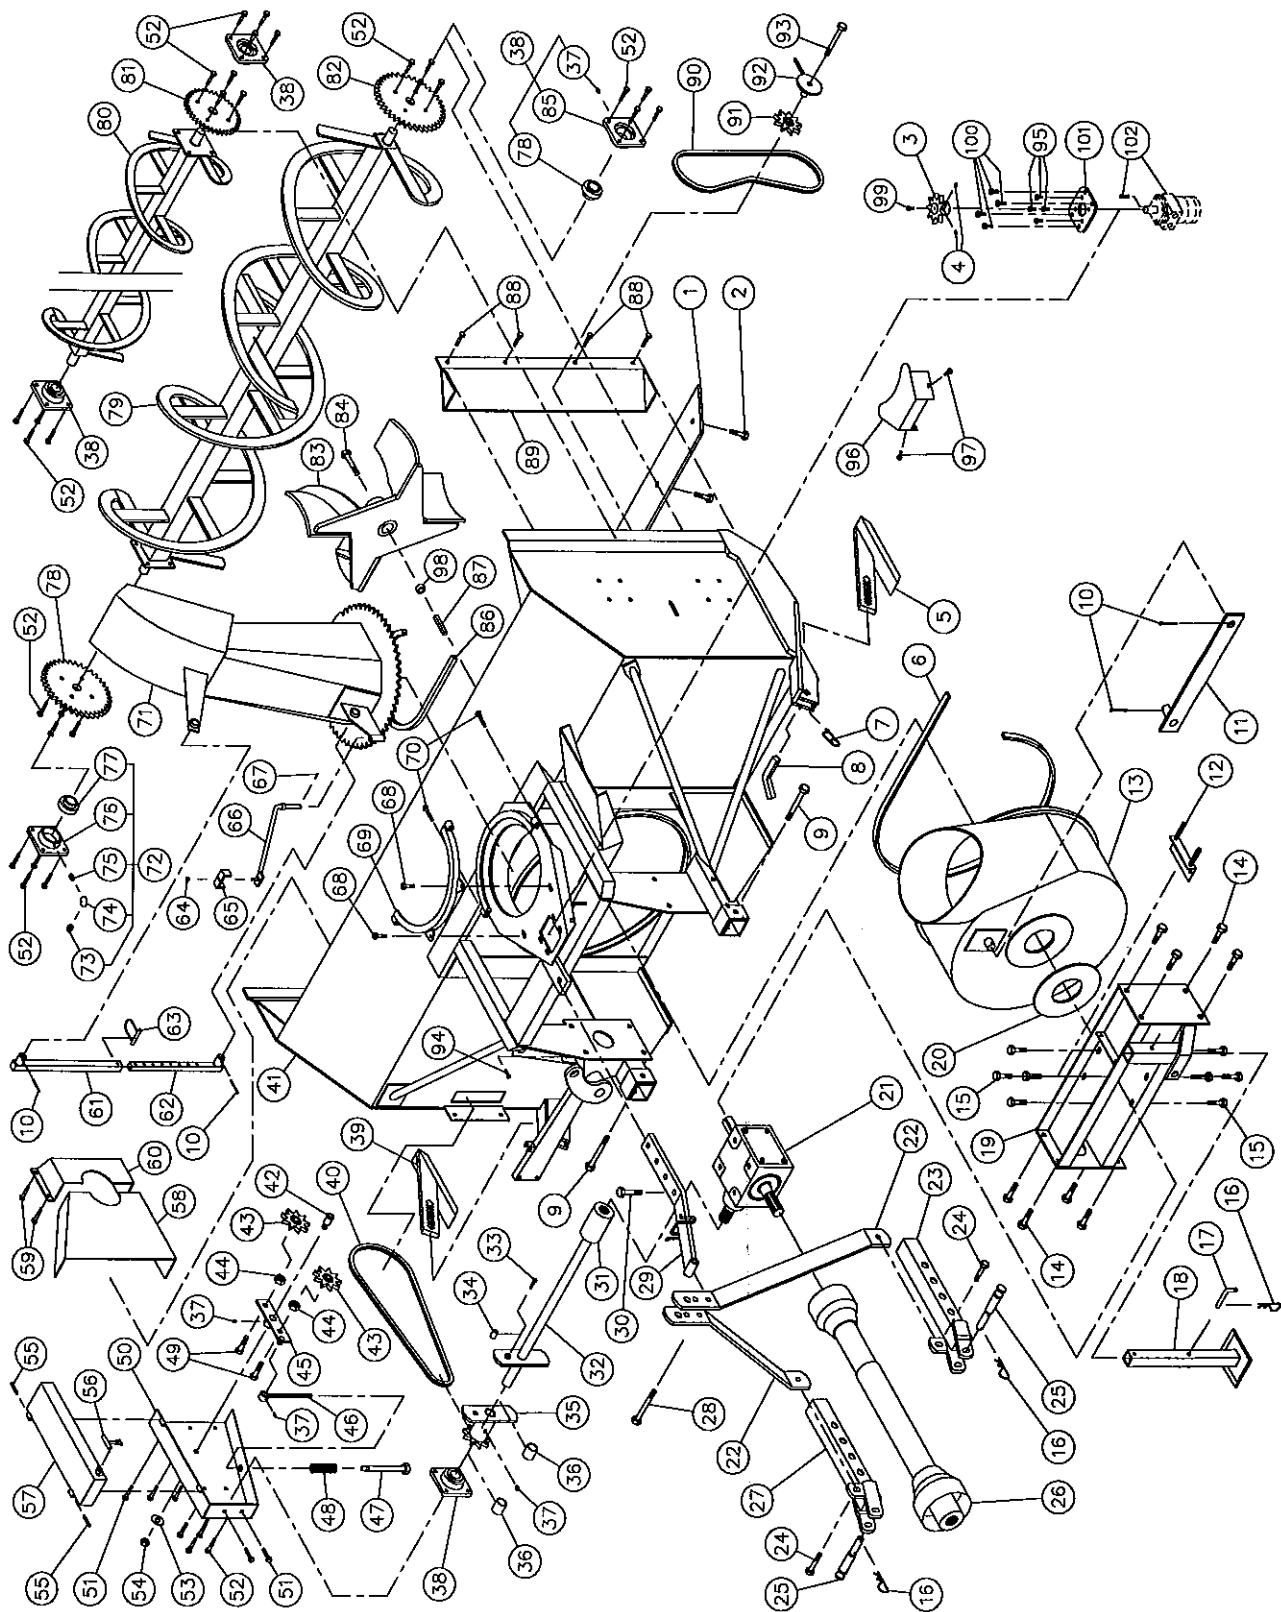


SNOWBLOWER P-862TRC (cont'd)

REF.	PART #	DESCRIPTION	QTY
1	140-00911	Reversible scraper blade 3/8" x 4" x 79½" lg	1
2	125-0715	Plow bolt 7/16" NC x 1½" lg + nut & lockwasher	8
3	110-04182	Sprocket 9 tooth	opt.
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)	opt.
5	110-05491	Skid shoe (right side)	1
6	8196	U-shaped UHMW 3/8" x 7/8" x 91" lg	1
7	8297	Safety square pin 3.5 mm x 84 mm	opt.
8	140-01861	Skid shoes lock	2
9	Std.	Bolt 5/8" NF x 5" lg + nylon locknut	2
10	Std.	Hairpin cotter 5/32" x 2" lg	4
11	8229	Connecting rod ½" x 2" x 22" lg	1
12	110-02081	Adjustment plate for gear box + 4 nuts ½" NC	1
13	8198	Rotary drum 28" Ø	1
14	Std.	Bolt 5/8" NC x 1½" lg + nylon locknut	8
15	Std.	Bolt ½" NC x 1" lg + lock washer + 6 flat washers	8
16	Std.	Hitch pin clip 5/32"	3
17	8220	Storage support pin	1
18	8219	Storage support	1
19	110-02121	Gear box support	1
20	8232	UHMW flat washer 3/16" x 4 5/8" i.d. x 8 1/8" o.d.	1
21	8251	Gear box	1
22	8180	3-points side bar	2
23	8936	Right lower hitch	1
24	Std.	Bolt 5/8" NC x 2" lg + nylon locknut	2
25	8004	Pin category 1 & 2	2
26	8202	P.T.O. shaft	1
27	8935	Left lower hitch	1
28	Std.	Bolt 3/4" NF x 4 1/2" lg grade 8 + nylon locknut	1
29	8233	Upper hitch	1
30	Std.	Bolt 3/4" NC x 3" lg grade 8 + nylon locknut	1
31	6466	Splined adaptor 1½"-19 (welded)	1
32	110-05651	Auger drive shaft 32 7/16" lg overall (includes no. 31 and 34)	1
33	Std.	Bolt 1/4" NC x 2" lg grade 5 + nylon locknut	1
34	150-01491	Bushing 1/4" i.d. x 7/8" o.d. x 3/4" lg (welded)	2
35	8184	Sprocket #80 + shearplate (includes no. 36)	1
36	8009	Brass bushing 1 1/4" i.d. x 1 1/2" o.d. x 1 3/16" lg	2
37	Std.	Grease fitting 1/4"-28 straight	5
38	8011	Bearing 1 1/4" + flange	4
39	110-03151	Skid shoe (left side)	1
40	190-01441	Chain #80 x 78"lg	1
40	26A80	Connecting link #80	1
40	59-80	Offset link #80	1
41	---	Frame P-862TRC	1
42	150-00381	Idler clevis pin	1
43	9287	Idler sprocket #80	2
44	Std.	Nut 7/8" NC	2
45	110-01211	Idler	1
46	110-01231	Threaded rod for idler adjustment + nut 7/16" NC	1
47	110-01221	Threaded tube for idler adjustment	1
48	9473	Compression spring	1
49	Std.	Bolt 3/4" NC x 2 1/2" lg + nylon locknut	2
50	110-01851	Chain guard	1
51	Std.	Bolt 7/16" NC x 1" lg + nylon locknut	5

SNOWBLOWER P-862TRC (cont'd)

REF.	PART #	DESCRIPTION	QTY
52	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut	32
53	Std.	Flat washer 5/8"	1
54	346-44500	Nylon locknut 5/8" NC thin	1
55	Std.	Goupille à ressort 5/16" x 2" lg	2
56	8125	Rubber fastener	1
57	110-01271	Chain guard cover	1
58	130-02001	Inside guard (welded)	1
59	Std.	Bolt 3/8" NC x 1" lg + nylon locknut	4
60	8018	Inside guard (bolted)	1
61	8146	Chute adjusting tube	opt.
62	8145	Chute adjusting rod	opt.
63	8112	Lock pin 1/4"	opt.
64	Std.	Nylon locknut 5/16" NC	opt.
65	140-00881	Hoses mounting plate	opt.
66	110-01111	Mounting support plate	opt.
67	Std.	Cotter pin 1/8" x 1"	opt.
68	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2
69	110-01341	Retaining bracket	1
70	Std.	Bolt 7/16" NC x 3"lg + nylon locknut	2
71	120-00731	Chute	1
72	8011-C	Bearing 1 1/4" + flange+ elbow grease fitting	1
73	Std.	Grease fitting 1/8"-NPT straight	1
74	8226	Elbow 90° 1/8"-NPT	1
75	8227	Straight joint 1/8"-NPT	1
76	8166-M	Modified flange	1
77	8165	Bearing 1 1/4"	5
78	8185	Sprocket 80A30 T 1 1/4" ø	1
79	8139	Lower auger P-862TRC	1
80	8134	Upper auger P-862TRC	1
81	8144	Sprocket 60A30 T 1 1/4" ø	1
82	8021	Sprocket 60A38 T 1 1/4" ø	1
83	110-01881	Impeller 28" ø 4 blades	1
84	Std.	Impeller cap screw 5/8" NC x 1 1/2" lg (ass. with lock-tite 242) + lock washer	1
85	8166	Flange F207	4
86	8149	U-shaped UHMW ± 14" i. d.	1
87	8030	Square key 3/8" x 3/8" x 3 1/2" lg	1
88	Std.	Bolt 7/16 NC x 1" lg + nylon locknut	4
89	8135	Drive chain guard (upper auger)	1
90	190-01301	Chain #60 x 64" lg	1
91	8186	Idler sprocket #60	1
92	8136	Idler for upper auger (hole 1/2") + 2 nuts 1/2" NC	1
93	Std.	Bolts 1/2" NC x 3 1/2" lg + nylon locknut & flat washer	1
94	Std.	Rotary drum safety shear bolt 3/8" NC x 2" lg + nylon locknut	1
95	Std.	Bolt 3/8" NC x 1" lg + lock washer (4)	opt.
96	130-08161	Guard	opt.
97	Std.	Bolt 7/16" NC x 1 1/4" lg +nylon locknut + flat washer (2)	opt.
98	8298	Spacer 3/4" i.d. x 1 1/4" o.d. x 9/16" lg	1
99	Std.	Bolt 1/4" NC x 3/4" lg + lock washer	opt.
100	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)	opt.
101	130-08151	Orbit motor support	opt.
102	---	Hydraulic orbit motor	opt.

SNOWBLOWER P-920 P-920-98

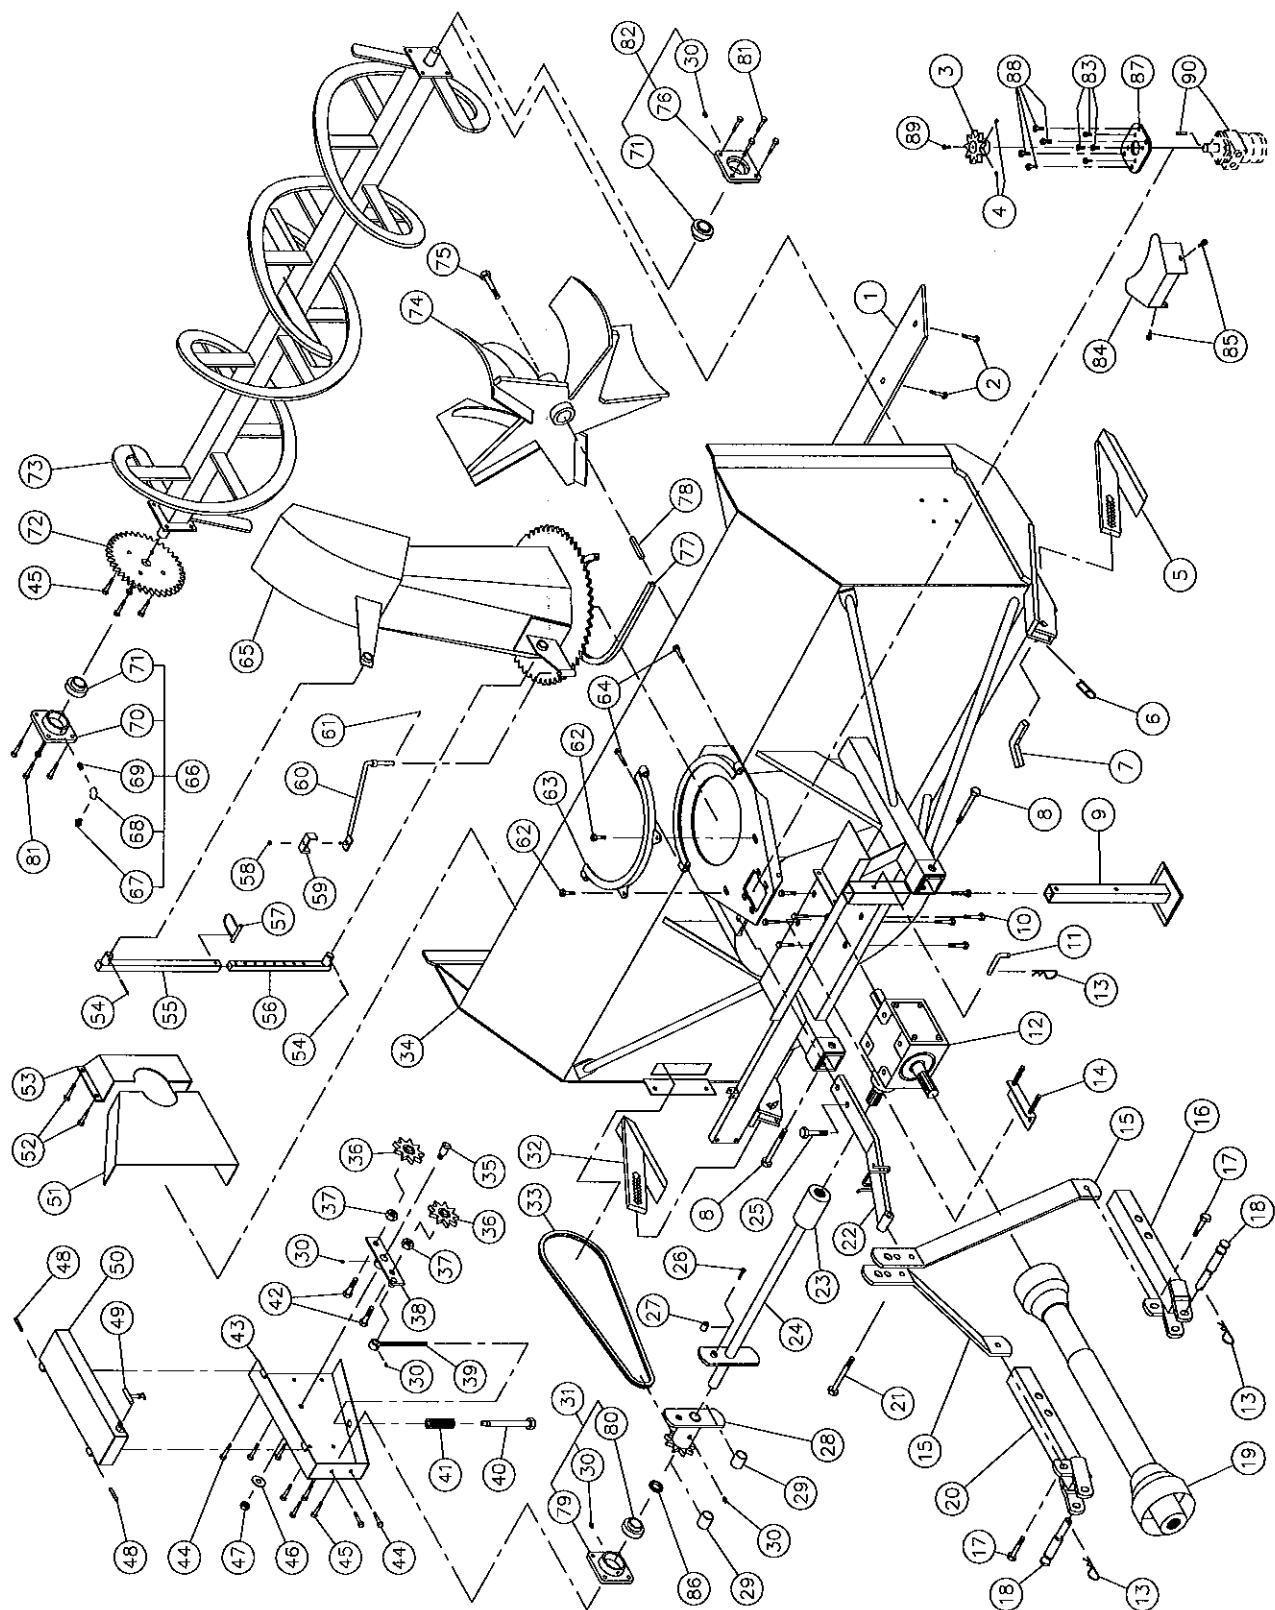


SNOWBLOWER P-920 P-920-98 (cont'd)

REF.	PART #	DESCRIPTION	QTY	P-920	P-920-98
1	140-00811	Reversible scraper blade 3/8" x 4" x 84½" lg	1	-	
1	140-00831	Reversible scraper blade 3/8" x 4" x 90½" lg	-	1	
2	125-0717	Plow bolt 7/16" x 1 ¼" lg + nut & lock washer	9	9	
3	110-04182	Sprocket 9 tooth		opt. opt.	
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)		opt. opt.	
5	110-04531	Skid shoe (right side)	1	1	
6	8297	Safety square pin 3.5 mm x 84 mm	2	2	
7	140-03361	Skid shoes lock	2	2	
8	Std.	Bolt 3/4" NC x 6" lg + nylon lock nut	2	2	
9	9462	Storage support	1	1	
10	Std.	Bolt 5/8" NC x 1 1/4" lg +lock washer + 6 flat washers	8	8	
11	8220	Storage support pin	1	1	
12	9522	Gear box (for serial number up to 11586)	1	1	
12	9307	Gear box (for serial number from 11587)	1	1	
13	Std.	Hitch pin clip 5/32"	3	3	
14	9428	Adjustment plate for gear box + 4 nuts 1/2" NC	1	1	
15	140-05491	3-points side bar	2	2	
16	110-01591	Right lower hitch	1	1	
17	Std.	Bolt 3/4" NC x 2 1/2" lg + nulon lock nut	2	2	
18	9269	Pin category 2	2	2	
19	9225	P.T.O. shaft	1	1	
20	110-00771	Left lower hitch	1	1	
21	Std.	Bolt 7/8" NF x 6" lg grade 8 + nylon lock nut	1	1	
22	110-07521	Upper hitch	1	1	
23	6467	Splined adaptor 1¼"-20 (welded)	1	1	
24	9305	Auger drive shaft 34 3/8" lg overall (includes no. 23 and 27)	1	-	
24	110-05201	Auger drive shaft 37 3/8" lg overall (includes no. 23 and 27)	-	1	
25	Std.	Bolt 7/8" NC x 3 ½" lg grade 8 + nylon lock nut	1	1	
26	Std.	Bolt 5/16" NC x 2" lg grade 5 + nylon lock nut	1	1	
27	150-01531	Bushing 5/16" i.d. x 7/8" o.d. x ¾" lg (welded)	2	2	
28	9294	Sprocket #80 + shearplate (includes no. 29)	1	1	
29	8009	Brass bushing 1¼" i.d. x 1½" o.d. x 1 3/16" lg	2	2	
30	Std.	Grease fitting ¼"-28 straight	5	5	
31	8011	Bearing 1¼" + flange	1	1	
32	110-04521	Skid shoe (left side)	1	1	
33	190-00431	Chain #80 x 79 3/4" lg	1	1	
33	26A80	Connecting link #80	1	1	
33	59-80	Offset link #80	1	1	
34	---	Frame P-920	1	-	
34	---	Frame P-920-98	-	1	
35	150-00332	Idler clevis pin	1	1	
36	9287	Idler sprocket #80 (steel)	1	1	
37	Std.	Nut 7/8" NC	2	2	
38	110-01052	Idler	1	1	
39	110-01062	Threaded rod for idler adjustment + nut 7/16" NC	1	1	
40	110-01071	Threaded tube for idler adjustment	1	1	
41	9473	Compression spring	1	1	
42	Std.	Bolt 3/4" NC x 2 1/2" lg + nylon locknut	2	2	
43	110-01601	Chain guard	1	1	

SNOWBLOWER P-920 P-920-98 (cont'd)

REF.	PART #	DESCRIPTION	QTY	P-920	P-920-98
44	Std.	Bolt 7/16" NC x 1" lg + nylon lock nut	5	5	
45	Std.	Bolt 7/16" NC x 1½" lg + nylon lock nut	8	8	
46	Std.	Flat washer 5/8"	1	1	
47	346-44500	Nylon locknut 5/8" NC thin	1	1	
48	Std.	Roll pin 5/16" x 2" lg	2	2	
49	8125	Rubber fastener	1	1	
50	110-00951	Chain guard cover	1	1	
51	130-01381	Inside guard (welded)	1	1	
52	Std.	Bolt 3/8" NC x 1" lg + nylon lock nut	4	4	
53	8925	Inside guard (bolted)	1	1	
54	Std.	2 hairpin cotter 5/32" x 2" lg		opt. opt.	
55	8146	Chute adjusting tube		opt. opt.	
56	8145	Chute adjusting rod		opt. opt.	
57	8112	Lock pin ¼"		opt. opt.	
58	Std.	Nylon locknut 5/16" NC		opt. opt.	
59	140-00881	Hoses mounting plate		opt. opt.	
60	110-01111	Mounting support plate		opt. opt.	
61	Std.	Cotter pin 1/8" x 1"		opt. opt.	
62	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2	2	
63	110-01341	Retaining bracket	1	1	
64	Std.	Bolt 7/16" NC x 3" lg + nylon locknut	2	2	
65	120-00731	Chute	1	1	
66	9277-C	Bearing 1½" + flange + elbow grease fitting	1	1	
67	Std.	Grease fitting 1/8"-NPT straight	1	1	
68	8226	Elbow 90° 1/8"-NPT	1	1	
69	8227	Straight joint 1/8"-NPT	1	1	
70	9410-M	Modified flange F208	1	1	
71	9409	Bearing 1½"	2	2	
72	9281	Sprocket 80A30 T 1½" ø	1	1	
73	110-02061	Auger P-920	1	-	
73	110-05171	Auger P-920-98	-	1	
74	110-04741	Impeller 30" ø 5 blades	1	1	
75	Std.	Impeller cap screw 5/8" x 1 1/2" lg (ass. with lock-tite 242) + lock washer	1	1	
76	9410	Flange F208	1	1	
77	8149	U-shaped UHMW ± 14" i. d.	1	1	
78	9285	Square key 1/2" x 1/2" x 4" lg	1	1	
79	8166	Flange F207	1	1	
80	8165	Bearing 1½"	1	1	
81	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut	8	8	
82	9277	Bearing 1½" + flange	1	1	
83	Std.	Bolt 3/8" NC x 1" lg + lock washer (4)		opt. opt.	
84	130-08161	Guard		opt. opt.	
85	Std.	Bolt 7/16" NC x 1 1/4" lg + nylon locknut + flat washer (2)		opt. opt.	
86	160-03941	Spacer 1¼" i.d. x 1¾" o.d. x 9/32" thickness	1	1	
87	130-08151	Orbit motor support		opt. opt.	
88	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)		opt. opt.	
89	Std.	Bolt 1/4" NC x 3/4" lg + lock washer		opt. opt.	
90	---	Hydraulic orbit motor		opt. opt.	

SNOWBLOWER P-920TRC P-920-98TRC

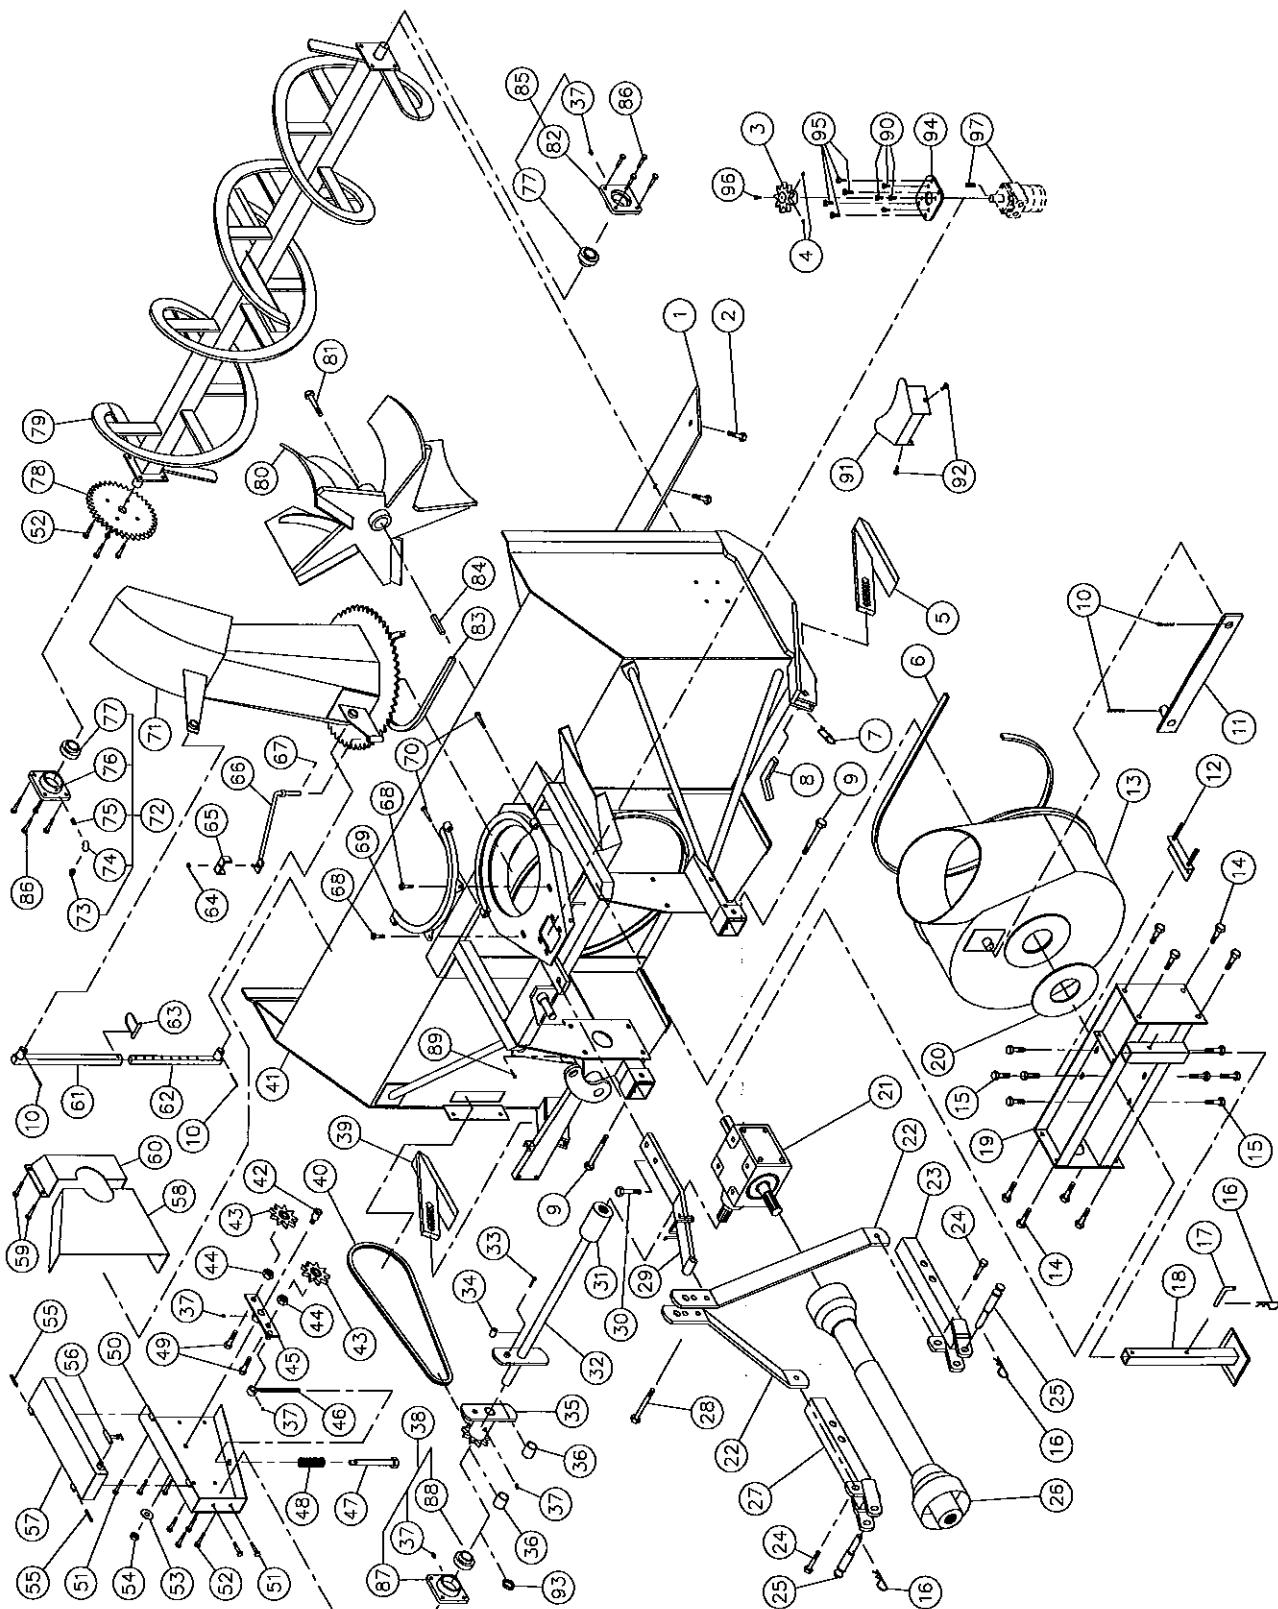


SNOWBLOWER P-920TRC P-920-98TRC (cont'd)

REF.	PART #	DESCRIPTION	QTY	P-920TRC	P-920-98TRC
1	140-00811	Reversible scraper blade 3/8" x 4" x 84½" lg	1	-	
1	140-00831	Reversible scraper blade 3/8" x 4" x 90½" lg	-	1	
2	125-0717	Plow bolt 7/16" NC x 1¼" lg + nut & lock washer	9	9	
3	110-04182	Sprocket 9 tooth	opt.	opt.	
4	Std.	Hexagonal socket set screw 3/8" NC x 3/8" lg (2)	opt.	opt.	
5	110-04531	Skid shoe (right side)	1	1	
6	9435	U-shaped UHMW 3/8" x 7/8" x 97" lg	1	1	
7	8297	Safety square pin 3.5 mm x 84 mm	2	2	
8	140-03361	Skid shoes lock	2	2	
9	Std.	Bolt 3/4" NC x 6" lg + nylon lock nut	2	2	
10	Std.	Cotter pin 5/32" x 2" lg	4	4	
11	110-01911	Connecting rod ½" x 2" x 25¾" lg	1	1	
12	9428	Adjustment plate for gear box + 4 nuts ½" NC	1	1	
13	110-01921	Rotary drum 30" ø x 12" depth	1	1	
14	Std.	Bolt 3/4" NC x 2" lg + nylon lock nut	8	8	
15	Std.	Bolt 5/8" NC x 1¼" lg + lockwasher + 6 flat washers	8	8	
16	Std.	Hitch pin clip 5/32"	3	3	
17	8220	Storage support pin	1	1	
18	9462	Storage support	1	1	
19	110-01681	Gear box support (for serial number up to 11586)	1	1	
19	110-01682	Gear box support (for serial number from 11587)	1	1	
20	9432	UHMW flat washer 3/16" x 8 5/8" i.d. x 11 1/2" o.d.	1	1	
21	9522	Gear box (for serial number up to 11586)	1	1	
21	9307	Gear box (for serial number from 11587)	1	1	
22	140-05471	3-points side bar	2	2	
23	110-01591	Right lower hitch	1	1	
24	Std.	Bolt 3/4" NC x 2½" lg + nylon lock nut	2	2	
25	9269	Pin category 2	2	2	
26	9225	P.T.O. shaft	1	1	
27	110-00771	Left lower hitch	1	1	
28	Std.	Bolt 7/8" NF x 6" lg grade 8 + nylon lock nut	1	1	
29	110-07511	Upper hitch	1	1	
30	Std.	Bolt 7/8" NC x 3 1/2" lg grade 8 + nylon lock nut	1	1	
31	6467	Splined adaptor 1 ¾" - 20 (welded)	1	1	
32	9305	Auger drive shaft 34 3/8" lg overall (includes no. 31 and 34)	1	-	
32	110-05201	Auger drive shaft 37 3/8" lg overall (includes no. 31 and 34)	-	1	
33	Std.	Bolt 5/16" NC x 2" lg grade 5 + nylon locknut	1	1	
34	150-01531	Bushing 5/16" i.d. x 7/8" o.d. x 3/4" lg (welded)	2	2	
35	9294	Sprocket #80 + shearplate (includes no. 36)	1	1	
36	8009	Brass bushing 1 1/4" i.d. x 1 1/2" o.d. x 1 3/16" lg	2	2	
37	Std.	Grease fitting 1/4"-28 straight	5	5	
38	8011	Bearing 1 1/4" + flange	1	1	
39	110-04521	Skid shoe (left side)	1	1	
40	190-00431	Chain #80 x 79 3/4" lg	1	1	
40	26A80	Connecting link #80	1	1	
40	59-80	Offset link #80	1	1	
41	---	Frame P-920TRC	1	-	
41	---	Frame P-920-98TRC	-	1	
42	150-00332	Idler clevis pin	1	1	
43	9287	Idler sprocket #80	2	2	
44	Std.	Nut 7/8" NC	2	2	
45	110-01052	Idler	1	1	
46	110-01062	Threaded rod for idler adjustment + nut 7/16" NC	1	1	
47	110-01071	Threaded tube for idler adjustment	1	1	
48	9473	Compression spring	1	1	

SNOWBLOWER P-920TRC P-920-98TRC (cont'd)


REF.	PART #	DESCRIPTION	QTY	P-920TRC	P-920-98TRC
49	Std.	Bolt 3/4" NC x 2 1/2" lg + écrou à blocage de nylon	2	2	
50	110-01601	Chain guard	1	1	
51	Std.	Bolt 7/16" NC x 1" lg + nylon lock nut	5	5	
52	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon lock nut	8	8	
53	Std.	Flat washer 5/8"	1	1	
54	346-44500	Nylon locknut 5/8" NC thin	1	1	
55	Std.	Roll pin 5/16" x 2" lg	2	2	
56	8125	Rubber fastener	1	1	
57	110-00951	Chain guard cover	1	1	
58	130-01381	Inside guard (welded)	1	1	
59	Std.	Bolt 3/8" NC x 1" lg + nylon locknut	4	4	
60	8925	Inside guard (bolted)	1	1	
61	8146	Chute adjusting tube	opt. opt.		
62	8145	Chute adjusting rod	opt. opt.		
63	8112	Lock pin 1/4"	opt. opt.		
64	Std.	Nylon locknut 5/16" NC	opt. opt.		
65	140-00881	Hoses mounting plate	opt. opt.		
66	110-01111	Mounting support plate	opt. opt.		
67	Std.	Cotter pin 1/8" x 1"	opt. opt.		
68	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut & flat washer	2	2	
69	110-01341	Retaining bracket	1	1	
70	Std.	Bolt 7/16" NC x 3" lg + nylon locknut	2	2	
71	110-00731	Chute	1	1	
72	9277-C	Bearing 1 1/2" + flange	1	1	
73	Std.	Grease fitting 1/8"-NPT straight	1	1	
74	8226	Elbow 90° 1/8"-NPT	1	1	
75	8227	Straight joint 1/8"-NPT	1	1	
76	9410-M	Modified flange F208	1	1	
77	9409	Bearing 1 1/2"	2	2	
78	9281	Sprocket 80A30 T 1 1/2" ø	1	1	
79	110-02061	Auger P-920	1	-	
79	110-05171	Auger P-920-98	-	1	
80	110-04741	Impeller 30" ø 5 blades	1	1	
81	Std.	Impeller cap screw 5/8" NC x 1 1/2" lg (ass. with lock-tite 242) + lock washer	1	1	
82	9410	Flange F208	1	1	
83	8149	U-shaped UHMW ± 14" i. d.	1	1	
84	9285	Square key 1/2" x 1/2" x 4" lg	1	1	
85	9277	Bearing 1 1/2" + flange	1	1	
86	Std.	Bolt 1/2" NC x 1 3/4" lg + nylon locknut	8	8	
87	8166	Flange F207	1	1	
88	8165	Bearing 1 1/4"	1	1	
89	Std.	Rotary drum safety shear bolt 3/8" NC grade 5 x 2" lg + nylon locknut	1	1	
90	Std.	Bolt 3/8" NC x 1 " lg + (rondelle de blocage (4))	opt. opt.		
91	130-08161	Guard	opt. opt.		
92	Std.	Bolt 7/16" NC x 1 1/4" lg + nulon locknut + flat washer (2)	opt. opt.		
93	160-03941	Spacer 1 1/4" i.d. x 1 1/4" o.d. x 9/32" thickness	1	1	
94	130-08151	Orbit motor support	opt. opt.		
95	Std.	Bolt 7/16" NC x 1 1/2" lg + nylon locknut & flat washer (4)	opt. opt.		
96	Std.	Bolt 1/4" NC x 3/4" lg + lock washer	opt. opt.		
97	---	Hydraulic orbit motor	opt. opt.		

MANUAL CHUTE KIT M-7486

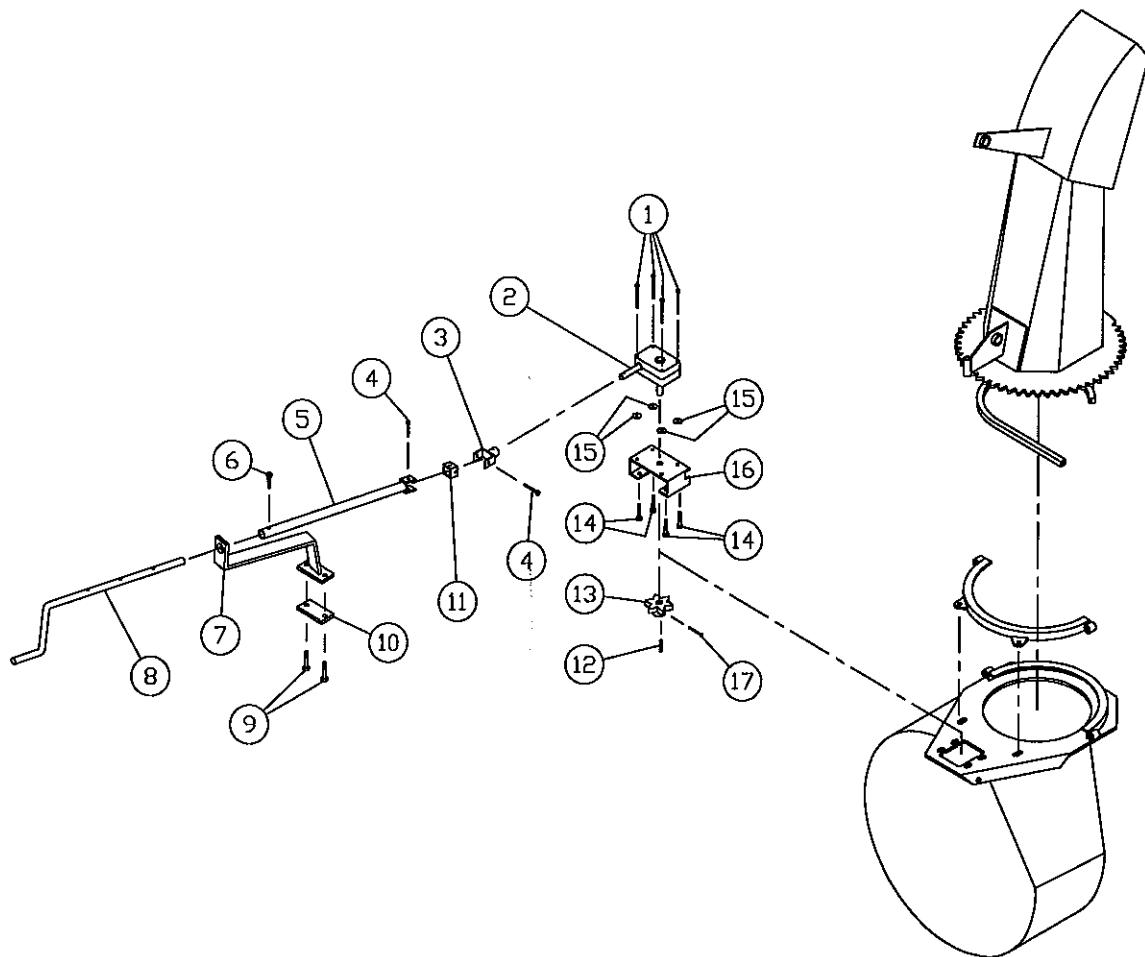


REF.	PART #	DESCRIPTION	QTY
1	Std.	Bolt 1/4" NC x 3 1/4" lg + nylon locknut & 2 flatwasher	4
2	8301	Gear box	1
3	110-07381	Front tube	1
4	Std.	Bolt 1/4" x 2" lg + nylon lock nut	2
5	110-07391	Rear tube	1
6	Std.	Bolt 1/4" x 1 1/2" lg + nylon locknut	1
7	110-07401	Crank support	1
8	150-01511	Crank	1
9	Std.	Bolt 7/16" x 2" lg + nylon locknut	2
10	140-05361	Support plate	1
11	8089	Universal block	1
12	140-05521	Key 3/16" x 1 1/4" lg	1
13	110-07241	6 tooth gear	1
14	Std.	Bolt 3/8" NC x 1 1/2" lg + nylon locknut + 2 flat washer	4
15	Std.	Flat washer 1/4"	4
16	130-08181	Rotation system support	1
17	Std.	Bolt 3/16" NC x 1 3/4" lg + nylon locknut	1

SEMI-INDUSTRIAL CHUTE PSI-7486

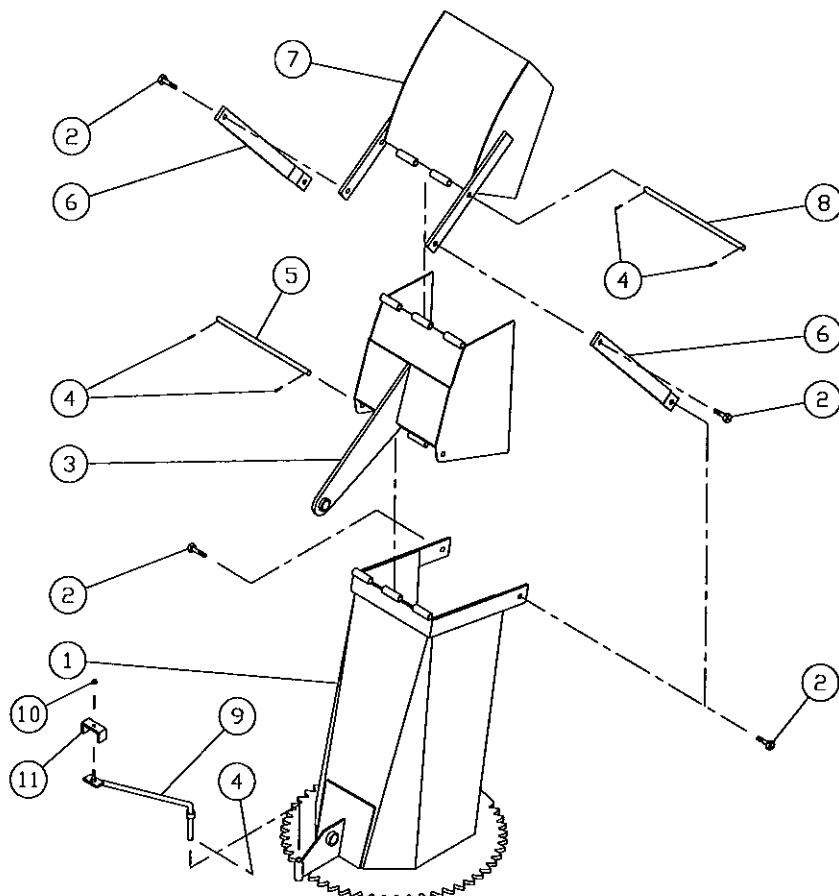

REF.	PART #	DESCRIPTION	QTY
1	120-00741	Chute base	1
2	Std.	Bolt 1/2" x 1 1/2 lg + nylon lock nut	4
3	8209	Lower chute deflector	1
4	Std.	Cotter pin 1/8" x 1" lg	5
5	8210	Lower chute deflector pin	1
6	8211	Connecting rod	2
7	8212	Upper chute deflector	1
8	8213	Upper chute deflector pin	1
9	110-01111	Threaded rod for idler adjustment	1
10	Std.	Nylon locknut 5/16" NC	1
11	140-00881	Fixation des boyaux	1


INDUSTRIAL CHUTE PC-7486

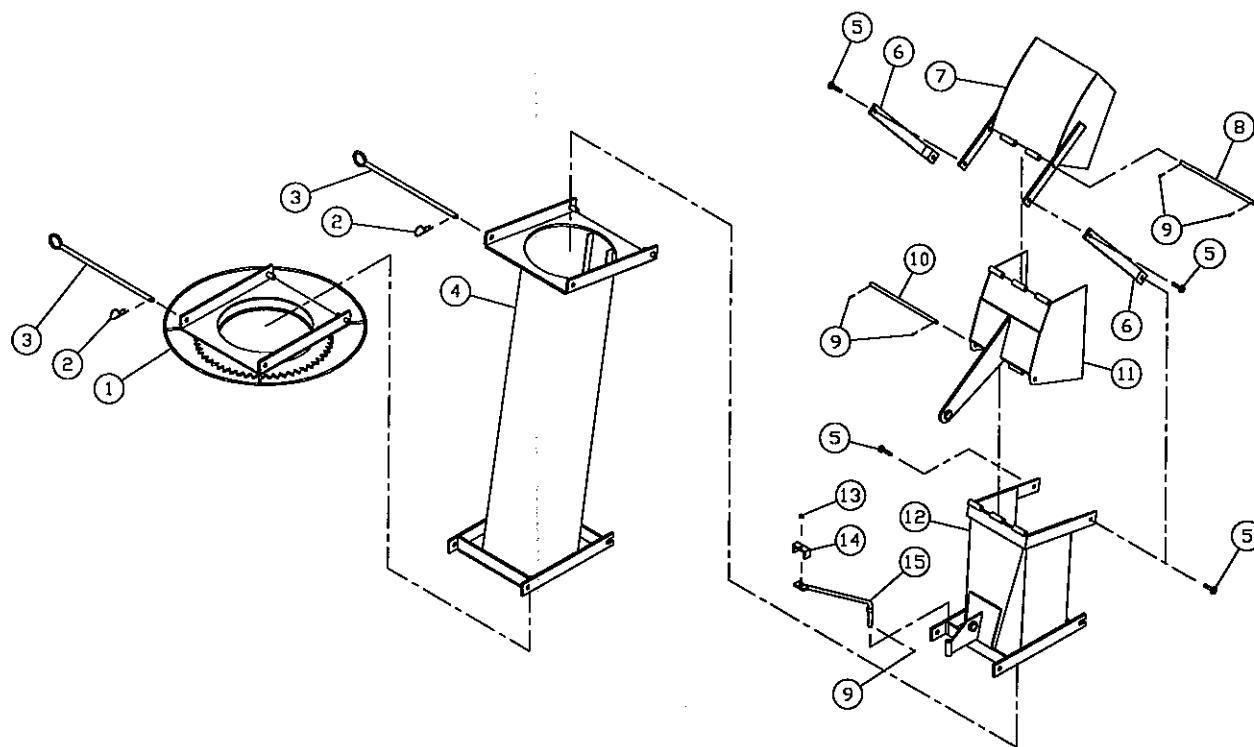

REF.	PART #	DESCRIPTION	QTY
1	110-01811	Chute adaptor with quick attach.....	1
2	Std.	Hitch pin clip 5/32"	2
3	8200	Pin for quick attach (adaptor & extension)	2
4	PR-7486	Extension 48" PR-7486	opt
5	Std.	Bolt 1/2" NC x 1½" lg + nylon lock nut.....	4
6	8211	Connecting rod	2
7	8212	Upper deflector	1
8	8213	Upper deflector pin	1
9	Std.	Cotter pin 1/8" x 1" lg	5
10	8210	Lower deflector pin	1
11	8219	Lower deflector	1
12	110-01821	Chute base	1
13	Std.	Nylon locknut 5/16" NC	1
14	140-00881	Hoses mounting plate	1
15	110-01111	Mounting support plate	1
NI*	110-01811	"Industrial" chute assembly (includes # 5, 6, 7, 8, 9, 10, 11, 12)	1


NI= NOT ILLUSTRATED

HEAVY DUTY KIT

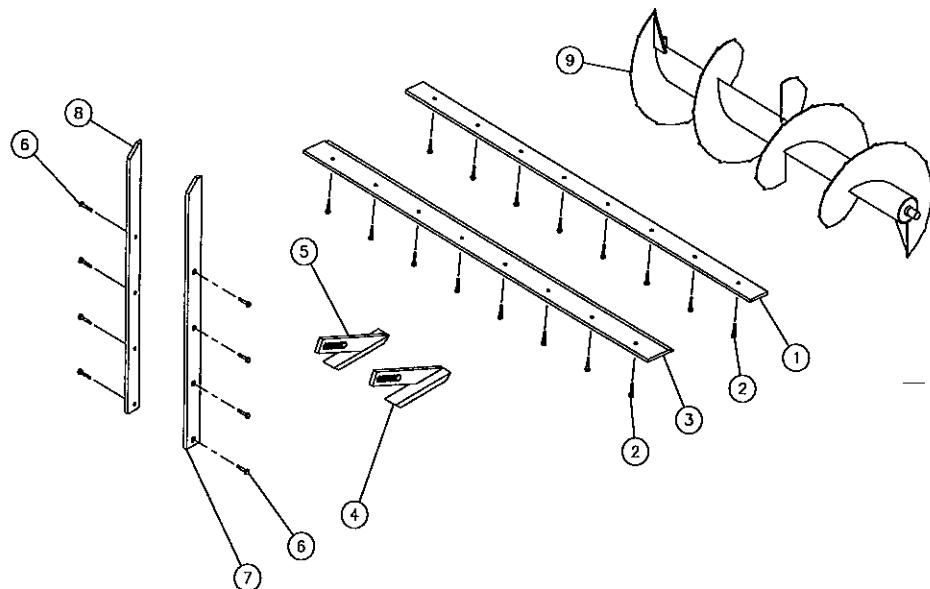


REF.	PART #	DESCRIPTION	P-740	P-740 TRC	P-800	P-800 TRC	P-860	P-860 TRC	P-862	P-862 TRC	P-920	P-920 TRC	P-920-98	P-920-98TRC
1	140-04051	Scraper blade (hardened steel, not sharpened, reversible) 1/2" x 4" x 67½" ...	1	1	-	-	-	-	-	-	-	-	-	-
1	140-04061	Scraper blade (hardened steel, not sharpened, reversible) 1/2" x 4" x 73½" ...	-	-	1	1	-	-	-	-	-	-	-	-
1	140-04071	Scraper blade (hardened steel, not sharpened, reversible) 1/2" x 4" x 79½" ...	-	-	-	-	1	1	1	1	-	-	-	-
1	140-04081	Scraper blade (hardened steel, not sharpened, reversible) 1/2" x 4" x 84½" ...	-	-	-	-	-	-	-	-	1	1	-	-
1	140-04091	Scraper blade (hardened steel, not sharpened, reversible) 1/2" x 4" x 90½" ...	-	-	-	-	-	-	-	-	-	-	1	1
2	Std.	Plow bolt 7/16" NC x 1½" lg + nut & lock washer	7	7	8	8	8	8	8	8	-	-	-	-
2	Std.	Plow bolt 7/16" NC x 1¾" lg + nut & lock washer	-	-	-	-	-	-	-	-	9	9	9	9
3	140-04111	Scraper blade (hardened steel, sharpened, not reversible) 1/2" x 6" x 67½" ...	1	1	-	-	-	-	-	-	-	-	-	-
3	140-04121	Scraper blade (hardened steel, sharpened, not reversible) 1/2" x 6" x 73½" ...	-	-	1	1	-	-	-	-	-	-	-	-
3	140-04131	Scraper blade (hardened steel, sharpened, not reversible) 1/2" x 6" x 79½" ...	-	-	-	-	1	1	1	1	-	-	-	-
3	140-04141	Scraper blade (hardened steel, sharpened, not reversible) 1/2" x 6" x 84½" ...	-	-	-	-	-	-	-	-	1	1	-	-
3	140-04151	Scraper blade (hardened steel, sharpened, not reversible) 1/2" x 6" x 90½" ...	-	-	-	-	-	-	-	-	-	-	1	1
4	110-05501	Carbon steel skid shoe (right side)	1	1	1	1	1	1	1	1	-	-	-	-
4	110-05511	Carbon steel skid shoe (right side)	-	-	-	-	-	-	-	-	1	1	1	1
5	110-04681	Carbon steel skid shoe (left side)	1	1	1	1	1	1	1	1	-	-	-	-
5	110-04811	Carbon steel skid shoe (left side)	-	-	-	-	-	-	-	-	1	1	1	1
6	Std.	Plow bolt 7/16" NC x 1½" lg + nut & lock washer	8	8	8	8	8	8	8	8	8	8	8	8
7	130-08291	Lateral blade (right side)	1	1	1	1	1	1	1	-	-	-	-	-
7	130-08301	Lateral blade (right side)	-	-	-	-	-	-	1	1	-	-	-	-
7	130-08321	Lateral blade (right side)	-	-	-	-	-	-	-	-	1	1	1	1
8	130-08292	Lateral blade (left side)	1	1	1	1	1	1	-	-	-	-	-	-
8	130-08302	Lateral blade (left side)	-	-	-	-	-	-	1	1	-	-	-	-
8	130-08322	Lateral blade (left side)	-	-	-	-	-	-	-	1	1	1	1	1
9	VIP-740	Full flight spiked auger	1	1	-	-	-	-	-	-	-	-	-	-
9	VIP-800	Full flight spiked auger	-	-	1	1	-	-	-	-	-	-	-	-
9	VIP-860	Full flight spiked auger	-	-	-	-	1	1	-	-	-	-	-	-
9	VIP-862	Full flight spiked auger	-	-	-	-	-	1	1	-	-	-	-	-
9	VIP-992	Full flight spiked auger	-	-	-	-	-	-	1	1	-	-	-	-
9	VIP-980	Full flight spiked auger	-	-	-	-	-	-	-	-	1	1	-	-

P.T.O. SHAFT # 8114 (T50)

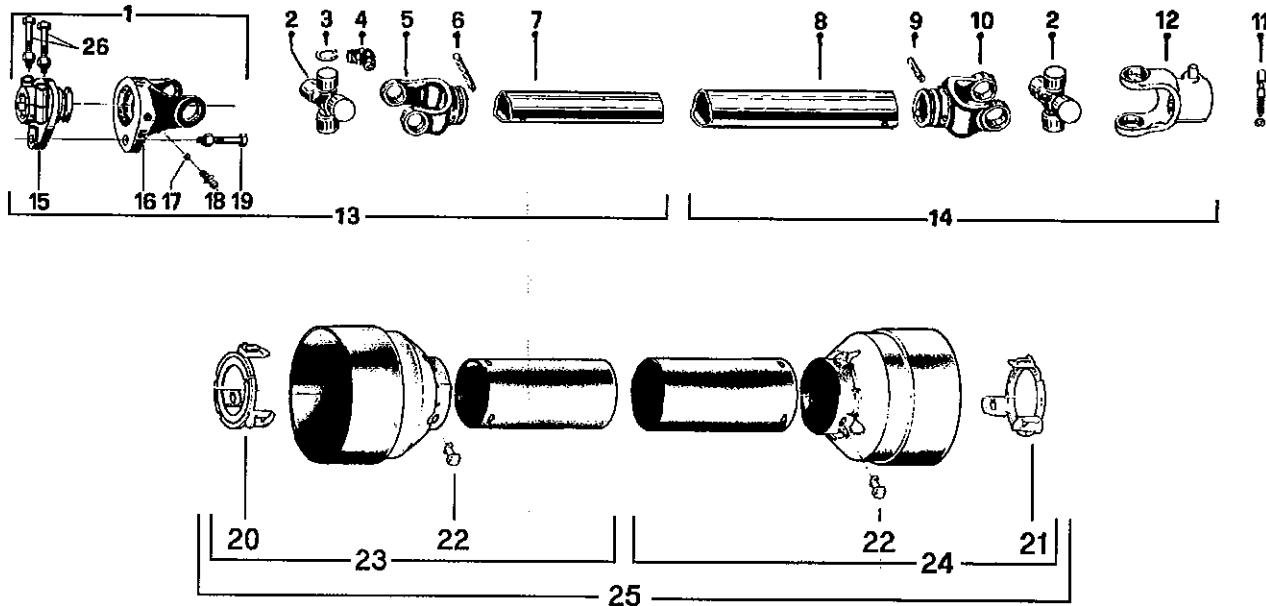


REF.	PART #	DESCRIPTION	QTY
1	8221	Safety shear yoke (2 bolts)	1
2	8073	U joint + 4 retaining rings + 1 grease fitting	2
3	8061	Retaining ring	8
4	8110	Grease fitting	2
5	8079	Yoke for inner tube	1
6	6341	Stopper for inner tube	1
7	8077	Inner tube	1
8	8076	Outer tube	1
9	8142	Stopper for outer tube	1
10	8074	Yoke for outer tube	1
11	8068-E	Yoke stopper 1 11/16"	1
12	8113	Yoke with hole 1 3/8"-6 splines + yoke stopper	1
13	8235	P.T.O. section, side with safety shear bolt, inner part, without protector	1
14	8236	P.T.O. section, side without safety shear bolt, outer part, without protector	1
15	8223	Adaptor (2 bolts)	1
16	8069	Yoke and shearplate	1
17	8070	Ball	17
18	8071	Grease fitting	1
19	8072	Safety shear bolt M10 x 50mm	1
20	8084-E	Bearing ring for inner guard tube	1
21	8083-E	Bearing ring for outer guard tube	1
22	8109	Stopper	6
23	8086	Inner shield	1
24	8085	Outer shield	1
25	8087	Complete shield	1
26	8222	Bolt M12 x 70mm + lock nut	2

P.T.O. SHAFT # 8202 (T60)

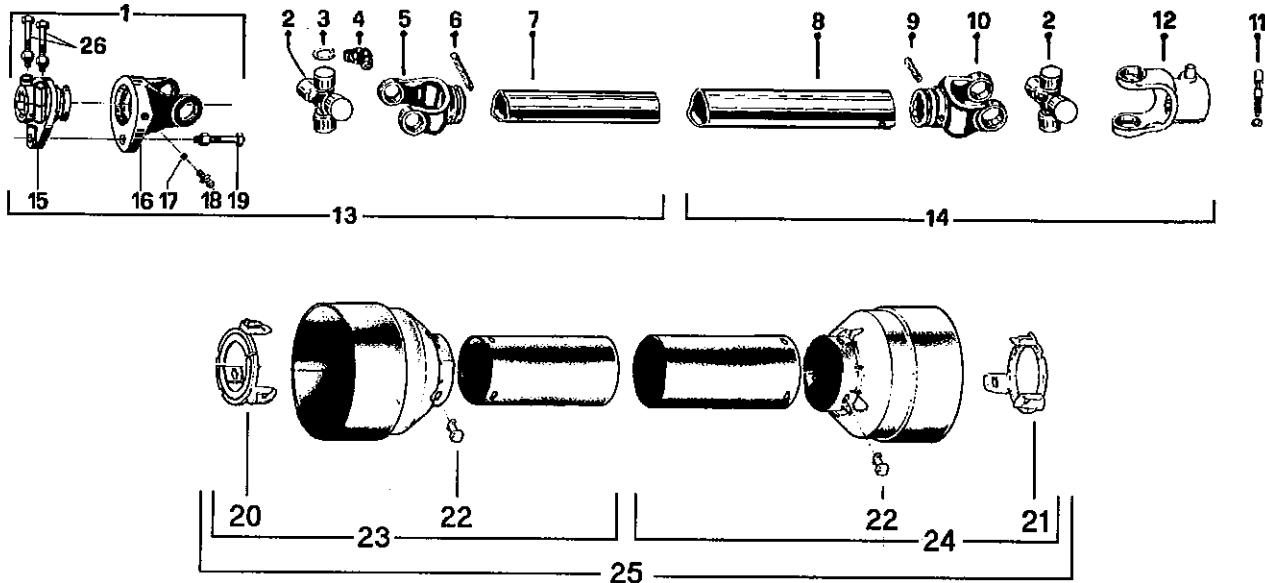


REF.	PART #	DESCRIPTION	QTY
1	8237	Safety shear yoke (2 bolts)	1
2	8238	U joint + 4 retaining rings + 1 grease fitting	2
3	8061	Retaining ring	8
4	8110	Grease fitting	2
5	8239	Yoke for inner tube	1
6	8075	Stopper for inner tube	1
7	8077	Inner tube	1
8	9212	Outer tube	1
9	9210-E	Stopper for outer tube	1
10	8240	Yoke for outer tube	1
11	8068-E	Yoke stopper 1 11/16"	1
12	8250	Yoke with hole 1 3/8"-6 splines + yoke stopper	1
13	8241	P.T.O. section, side with safety shear bolt, inner part, without protector	1
14	8242	P.T.O. section, side without safety shear bolt, outer part, without protector	1
15	8243	Adaptor (2 bolts)	1
16	8244	Yoke and shearplate	1
17	9205	Ball	17
18	8071	Grease fitting	1
19	8218	Safety shear bolt M10 x 60mm	1
20	8245	Bearing ring for inner guard tube	1
21	8246	Bearing ring for outer guard tube	1
22	8109	Stopper	6
23	8247	Inner shield	1
24	8248	Outer shield	1
25	8249	Complete shield	1
26	8222	Bolt M12 x 70mm + lock nut	2

P.T.O. SHAFT # 9225 (T80)

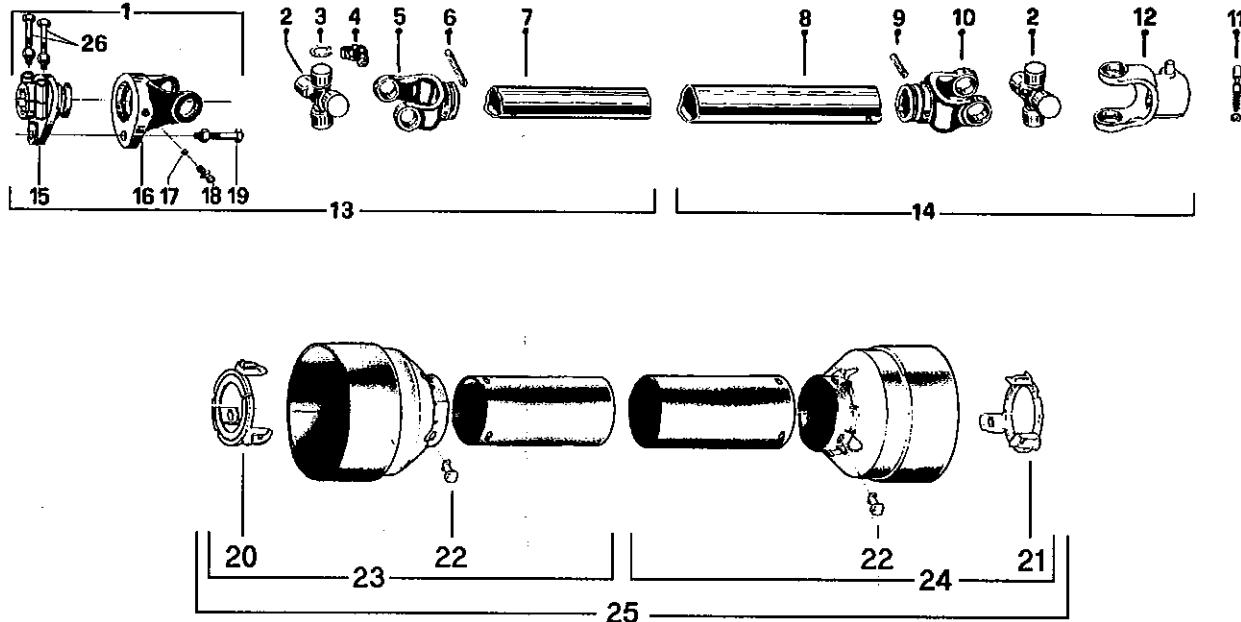


REF.	PART #	DESCRIPTION	QTY
1	9453	Safety shear yoke (2 bolts) 1 3/4" - 20 splines	1
1	9464	Safety shear yoke (2 bolts) 1 3/8" - 6 splines	opt.
2	9208	U-joint + 4 retaining rings + 1 grease fitting	2
3	9454	Retaining ring	8
4	8110	Grease fitting	2
5	9214	Yoke for inner tube	1
6	8075	Stopper for inner tube	1
7	9212	Inner tube	1
8	9211	Outer tube	1
9	9210-E	Stopper for outer tube	1
10	9209	Yoke for outer tube	1
11	8068	Yoke stopper 1 3/8"	2
12	9455	Yoke with hole 1 3/8"-6 splines + yoke stopper	1
12	9463	Yoke with hole 1 3/8"-21 splines + yoke stopper	opt.
12	9224	Yoke with hole 1 1/4"-20 splines + yoke stopper	opt.
13	9456	P.T.O. section, side with safety shear bolt, inner part, without protector	1
14	9457	P.T.O. section, side without safety shear bolt, outer part, without protector	1
15	9458	Adaptor 1 1/4"-20 splines (2 bolts)	1
15	9458-1	Adaptor 13/8"-6 splines (2 bolts)	opt.
16	9204	Yoke and shearplate	1
17	9205	Ball	17
18	8071	Grease fitting	1
19	9207	Safety shear bolt M12 x 65mm	1
20	9459	Bearing ring for inner guard tube	1
21	9460	Bearing ring for outer guard tube	1
22	8109	Stopper	6
23	9221	Inner shield	1
24	9220	Outer shield	1
25	9222	Complete shield	1
26	9461	Bolt M12 x 90mm + lock nut	2

P.T.O. SHAFT # 9475 (T90)

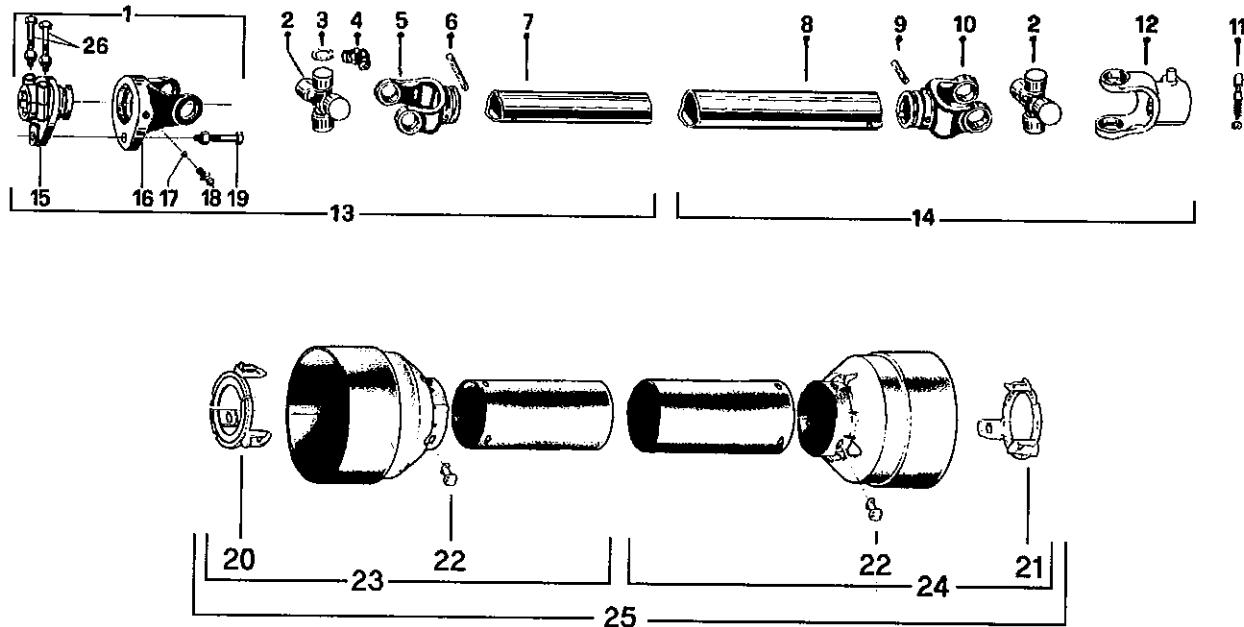


REF.	PART #	DESCRIPTION	QTY
1	9476	Safety shear yoke (2 bolts) 1 3/4" - 20 splines	1
2	9477	U-joint + 4 retaining rings + 1 grease fitting	2
3	9478	Retaining ring	8
4	8110	Grease fitting	2
5	9479	Yoke for inner tube	1
6	9210	Stopper for tube	1
7	9212	Inner tube	1
8	9211	Outer tube	1
9	9210	Stopper for tube	1
10	9480	Yoke for outer tube	1
11	9336	Yoke stopper 1 15/16"	1
12	9481	Yoke with hole 1 3/8"-6 splines + yoke stopper	2
12	9482	Yoke with hole 1 3/8"-21 splines + yoke stopper	1
12	9483	Yoke with hole 1 1/4"-20 splines + yoke stopper	opt.
13	9484	P.T.O. section, side with safety shear bolt, inner part, without protector	1
14	9485	P.T.O. section, side without safety shear bolt, outer part, without protector	1
15	9486	Adaptor 1 1/4"-20 splines (2 bolts)	1
16	9487	Yoke and shearplate	1
17	9205	Ball	24
18	8071	Grease fitting	1
19	9207	Safety shear bolt M12 x 65mm	1
20	9459	Bearing ring for inner guard tube	1
21	9460	Bearing ring for outer guard tube	1
22	8109	Stopper	6
23	9221	Inner shield	1
24	9220	Outer shield	1
25	9222	Complete shield	1
26	8222	Bolt M12 x 70mm + lock nut	2

GEAR BOX # 8251 (T27D)

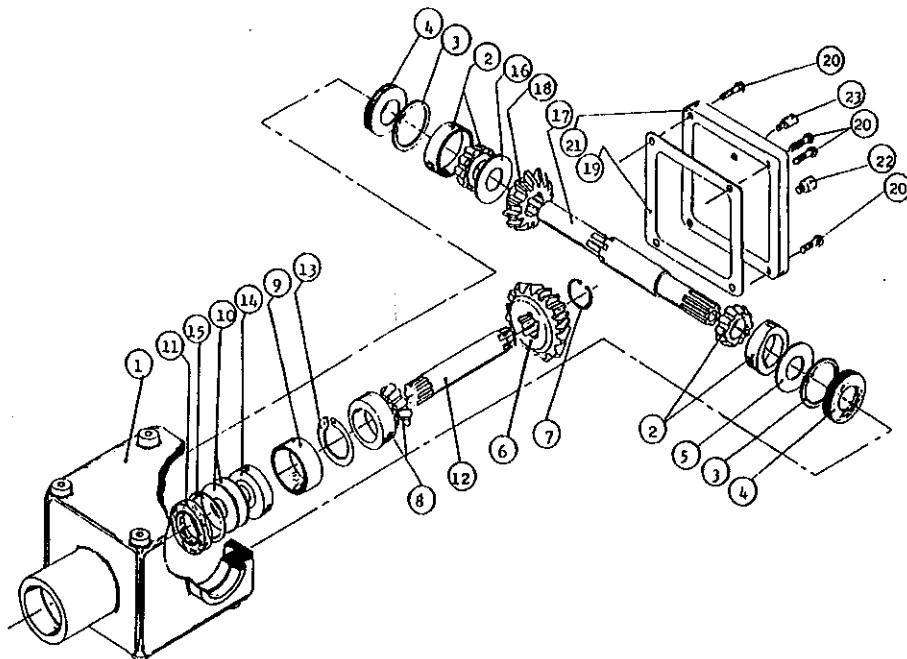


REF.	PART #	DESCRIPTION	QTY
1	8043	Casing	1
2	8044	Roller bearing no. 30208	2
3	8045	Inside circlip 80mm	2
4	8046	Oil seal 40 x 80 x 12mm	2
5	8047	Adjusting washer	1
6	8048	Gear Z18	1
7	8049	Outside circlip 40mm	1
8	8050	Roller bearing no. 30207	1
9	8051	Spacer ring	1
10	8052	Adjusting washer	2
11	8053	Oil seal 35 x 72 x 12mm	1
12	8054	Side shaft (1 1/4" - 19 splines)	1
13	8055	Inside circlip 72mm	1
14	8056	Ball bearing no. 6207	1
15	8057	Outside circlip 35mm	1
16	8058	Adjusting washer	1
17	8252	Impeller shaft (1.575" & 1 3/8" - 6 splines)	1
18	8060	Gear Z-18	1
19	8061	Gasket	1
20	8062	Bolt M10 x 14mm	4
21	8063	Cover	1
22	8064	Oil plug	1
23	8065	Oil filler plug	1

GEAR BOX # 9522

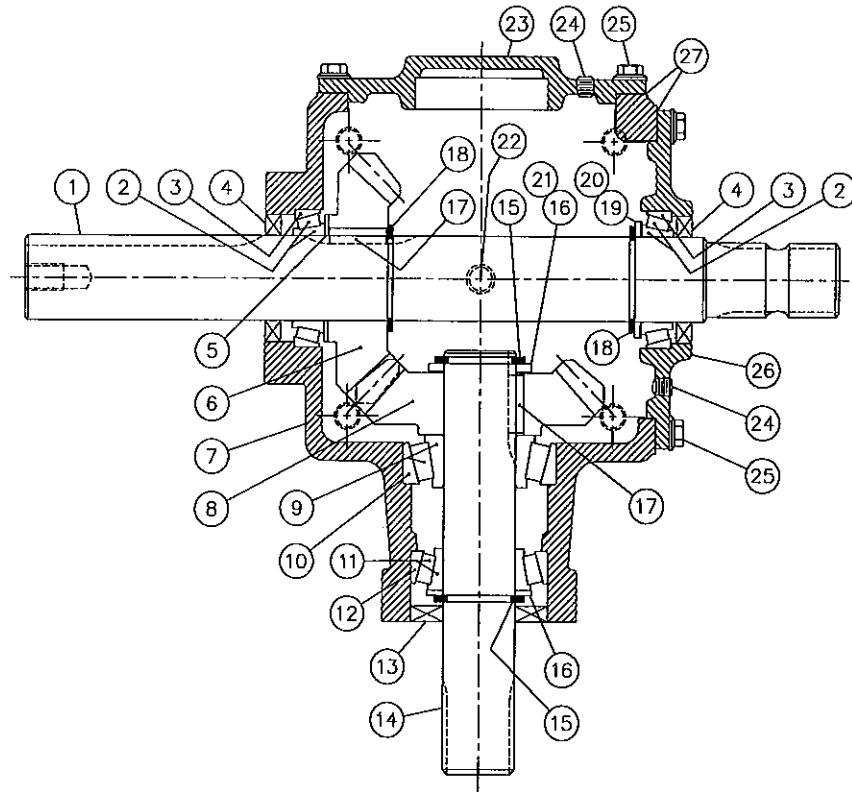


REF.	PART #	DESCRIPTION	QTY
1	9523	Impeller shaft 2" et 1 3/4"-20 splines	1
2	9245	Roller bearing cone LM104949	2
3	9246	Roller bearing cup LM104912	2
4	9526	Oil seal 2" i.d. x 3" o.d. CR19993	2
5	9527	Washer 2" i.d. x 0.083" thickness	1
6	9528	Gear 22 teeth - hole 2"	1
7	9529	Casing	1
8	9530	Gear 22 teeth - hole 1 3/4"	1
9	9531	Roller bearing cone 3782	1
10	9532	Roller bearing cup 3730	1
11	9249	Roller bearing cone 25581	1
12	9250	Roller bearing cup 25520	1
13	9535	Oil sealé 1 3/4" i.d. x 3.265" o.d.	1
14	9536	Side shaft 1 3/4"-20 splines	1
15	9537	Snap ring	2
16	9538	Washer 1 3/4" i.d. x .179" thickness	2
17	9539	Key 3/8" x 3/8" x 1.46" lg	2
18	9540	Snap ring	2
19	9541	Washer 2" i.d. x 0.134 thickness	1
20	9542	Shim 2" i.d. x 0.007 " thickness	nd
21	9543	Shim 1 3/4" d.i. x 0.007" thickness	nd
22	9524	Oil plug 1/2" NPT (top and bottom)	2
23	9544	Cover (closed)	1
24	9525	Oil plug 1/4" NPT	2
25	9533	Bolt 3/8" NC x 1" lg	16
26	9545	Cover (open)	1
27	9534	Spacer 0.007" thickness	nd

GEAR BOX # 9307 (T279)

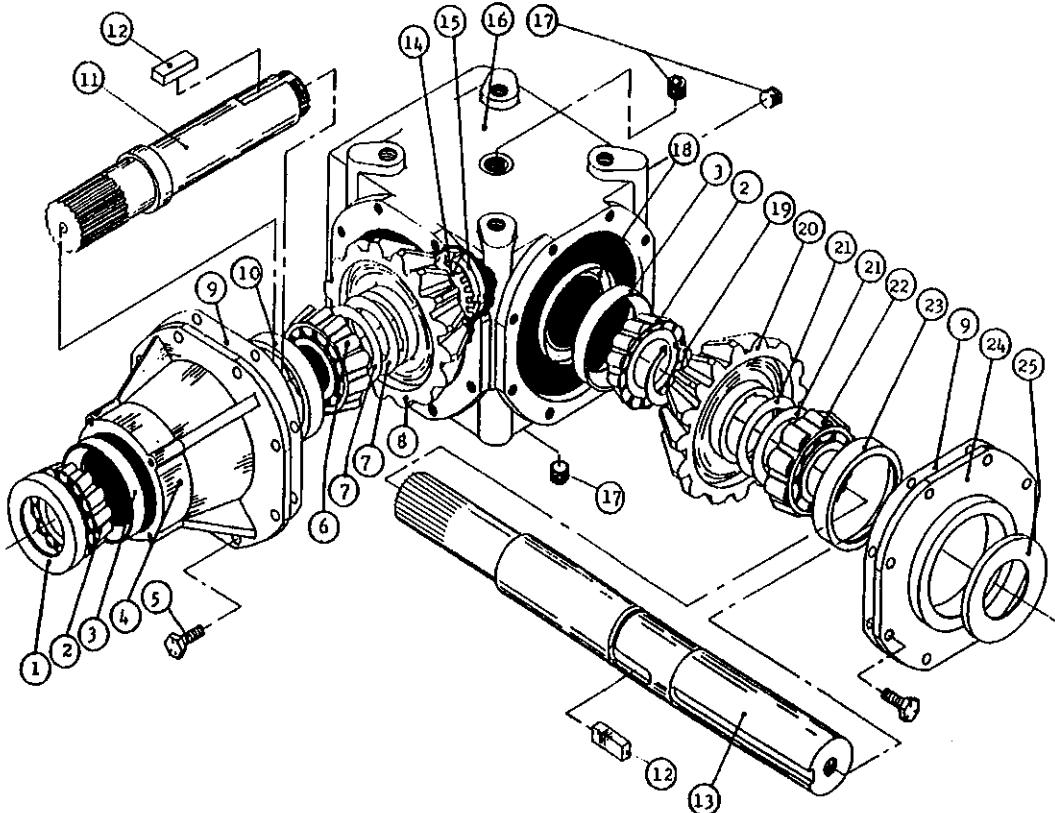

REF.	PART #	DESCRIPTION	QTY
1	6314	Oil seal 52 x 85 x 10	1
2	6315	Bearing 30209: cone	2
3	6317	Bearing 30209: cup	2
4	6318	Extension	1
5	6319	Bolt M10 x 22	16
6	6320	Bearing 32209: cone	1
7	6321	Shim	2
8	6322	Gear Z21	1
9	6323	Gasket	2
10	6324	Bearing 32209: cup	1
11	6325	Side shaft Z20 (1/4" - 20 splines)	1
12	6326	Key B14 x 9 x 40	2
13	9345	Impeller shaft (2" & 1/4" - 20 splines)	1
14	6328	Spring washer	1
15	6329	Lock nut M40 x 1.5 H9	1
16	6330	Casing	1
17	6331	Plug 3/8" gas	3
18	6332	Dust excluder 45 x 72 x 8	1
19	6333	External circlip 50 UNI7435	1
20	6334	Gear Z21	1
21	6335	Shim	2
22	6336	Bearing 30210: cone	1
23	6337	Bearing 30210: cup	1
24	6338	Cover	1
25	6339	Oil seal 50 x 72 x 8	1
2+3	6411	Roller bearing no. 30209	2
6+10	6410	Roller bearing no. 32209	1
22+23	6412	Roller bearing no. 30210	1


CYLINDER 25TR08

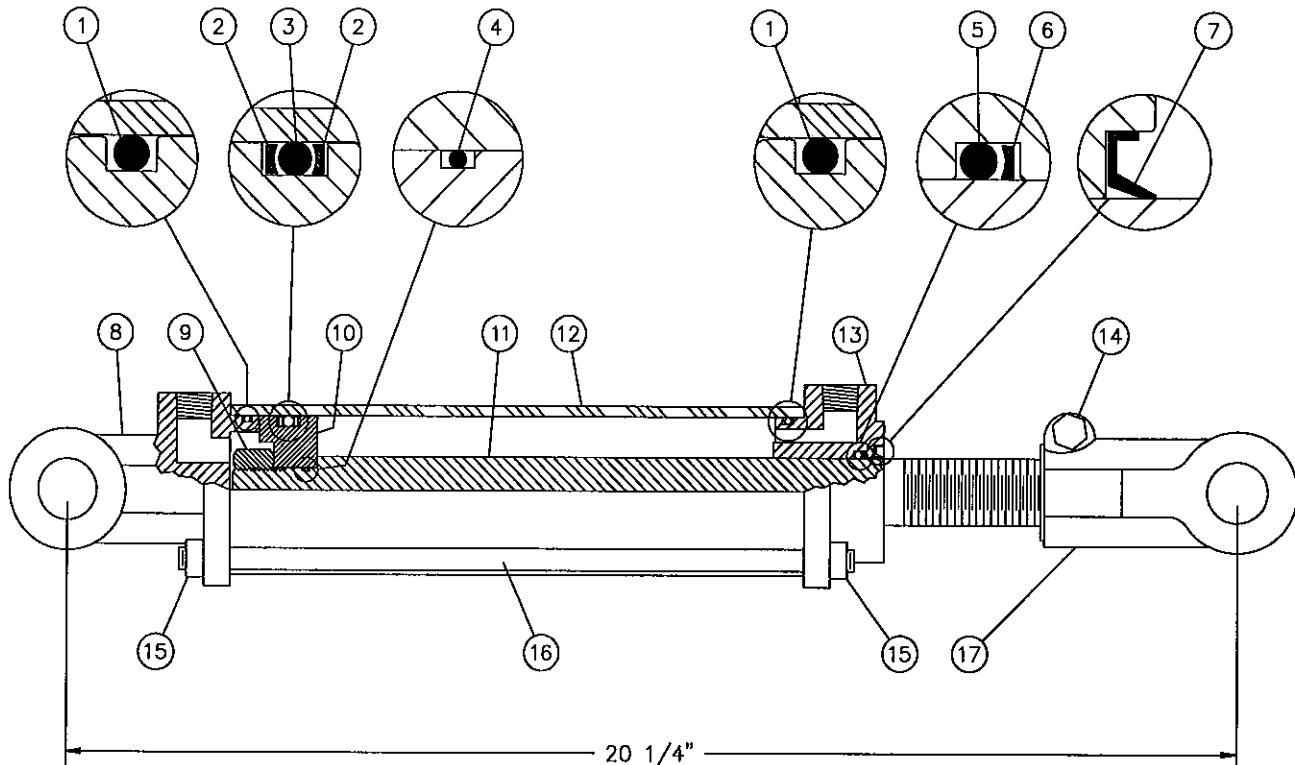

REF.	PART #	DESCRIPTION	QTY
1	See #RK25TR	O-ring 1/8" x 2 1/4" x 2 1/2"	2
2	See #RK25TR	Back-up 2 1/2" o.d. x 3/16 ø	2
3	See #RK25TR	O-ring 3/16" x 2 1/8" x 2 1/2"	1
4	See #RK25TR	O-ring 1/16" x 5/8" x 3/4"	1
5	See #RK25TR	O-ring 1/8" x 1 1/8" x 1 3/8"	1
6	See #RK25TR	Back-up 1 3/8" o.d. x 1/8" ø	1
7	See #RK25TR	Wiper 1 1/8" i.d. x 1 5/8" o.d.	1
8	492401	Yoke (for 2 1/2" tube)	1
9	Std.	Nut 3/4" NF	1
10	4924-31	Piston 2 1/2" ø	1
11	492028	Piston rod 1 1/8"	1
12	491668	Cylinder body 2 1/2" ø	1
13	492421	Head (for 2 1/2" tube)	1
14	Std.	Bolt 3/8" NC x 2 1/4" + nut	1
15	Std.	Nut 3/8" NC	8
16	Std.	Threaded rod 3/8" NC x 12" lg	4
17	458599	Yoke (for 1 1/8" rod)	1
NI*	8183	Pin 1" ø + cotter pin	2
NI*	RK25TR	Repair kit for cylinder 2 1/2" (includes # 1, 2, 3, 4, 5, 6, & 7)	1

*NI = NOT ILLUSTRATED

HYDRAULIC MOTOR # DH 250 & DH 315

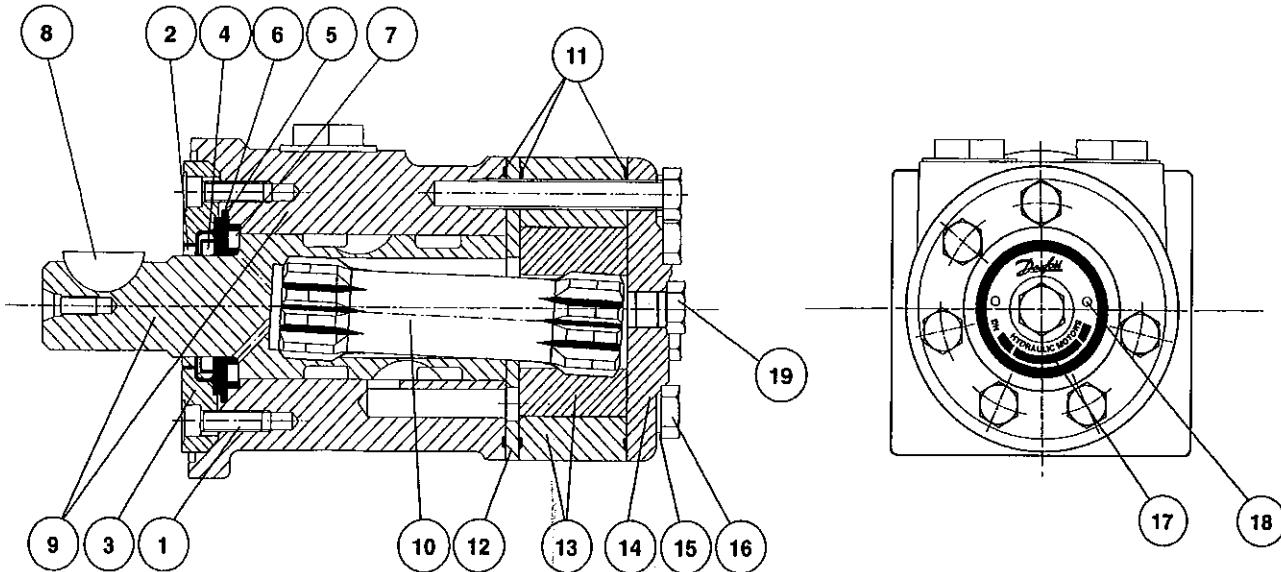

REF.	CODE #	DESCRIPTION	QTY	
			DH 250	DH 315
1	681X1961	Screw M5 x 16mm	6	6
2	151-1313	Dust seal ring	1	1
3	151-1827	Spigot flange	1	1
4	633B3385	Shaft seal BAKDH ring	1	1
5	633B1333	O-ring	1	1
6	151-1608	Bearing race	1	1
7	151-1458	Axial needle bearing	1	1
8	682L9054	Woodruff key	1	1
9	-----	Housing and output shaft	not sold	
10	151-2649	Cardan shaft	1	-
10	151-2650	Cardan shaft	-	1
11	633B1173	O-ring	3	3
12	151-1713	Distributor plate	1	1
13	151-1193	Gear wheel set	1	-
13	151-1186	Gear wheel set	-	1
14	151-2641	End cover	1	1
15	684X2481	Washer	6	6
16	681X0184	Screw M8 x 1.25mm Din 931 x 60mm lg	6	-
16	681X0186	Screw M8 x 1.25mm Din 931 x 70mm lg	-	6
17	151A0415	Name plate	1	1
18	681Z1011	Drive screw	2	2
19	631X2013	Drain plug 7/16"-20 UNF	1	1
NI*	151-1273	Set of seals	1	1

*NI = NOT ILLUSTRATED

TORQUE CHART

11

TORQUE SPECIFICATION TABLE

Thread UNC and UNF		Grade 2				Grade 5						Grade 8*					
Bolt size		Torque				Torque				Torque				Torque			
Inches	mm	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.
1/4	6.35	5	6	6.8	8.13	9	11	12.2	14.9	12	15	16.3	30.3				
5/16	7.94	10	12	13.6	16.3	17	20.5	23.1	27.8	24	29	32.5	39.3				
3/8	9.53	20	23	27.1	31.2	35	42	47.5	57.0	45	54	61.0	73.2				
7/16	11.11	30	35	40.7	47.4	54	64	73.2	86.8	70	84	94.9	113.9				
1/2	12.70	45	52	61.0	70.5	80	96	108.5	130.2	110	132	149.2	179.0				
9/16	14.29	65	75	88.1	101.6	110	132	149.2	179.0	160	192	217.0	260.4				
5/8	15.88	95	105	128.7	142.3	150	180	203.4	244.1	220	264	298.3	358.0				
3/4	19.05	150	185	203.3	250.7	270	324	366.1	439.3	380	456	515.3	618.3				
7/8	22.23	160	200	216.8	271.0	400	480	542.4	650.9	600	720	813.6	976.3				
1	25.40	250	300	338.8	406.5	580	696	786.5	943.8	900	1080	1220.4	1464.5				
1 1/8	25.58	-	-	-	-	800	880	1084.8	1193.3	1280	1440	1735.7	1952.6				
1 1/4	31.75	-	-	-	-	1120	1240	1518.7	1681.4	1820	2000	2467.9	2712.0				
1 3/8	34.93	-	-	-	-	1460	1680	1979.8	2278.1	2380	2720	3227.3	3688.3				
1 1/2	38.10	-	-	-	-	1940	2200	2630.6	2983.2	3160	3560	4285.0	4827.4				

* Thick nuts must be used with grade 8 bolts.

Size of screw	Thread	Pitch (mm)	Grade 4T				Grade 7T				Grade 8T			
			Torque		Torque		Torque		Torque		Torque		Torque	
			Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.	Pound feet min.	Pound feet max.	Newton meters min.	Newton meters max.
M6	UNC	1.00	3.6	5.8	4.9	7.9	5.8	9.4	7.9	12.7	7.2	10	9.8	13.6
M8	UNC	1.25	7.2	14	9.8	19	17	22	23	29.8	20	26	27.1	35.2
M10	UNC	1.5	20	25	27.1	33.9	34	40	46.1	54.2	38	46	51.5	62.3
M12	UNC	1.75	28	34	37.9	46.1	51	59	69.1	79.9	57	66	77.2	89.4
M14	UNC	2.0	49	56	66.4	75.9	81	93	109.8	126	96	109	130.1	147.7
M16	UNC	2.0	67	77	90.8	104.3	116	130	157.2	176.2	129	145	174.8	196.5
M18	UNC	2.0	88	100	119.2	136	150	168	203.3	227.6	175	194	237.1	262.9
M20	UNC	2.5	108	130	146.3	176.2	186	205	252	277.8	213	249	288.6	337.4
M8	UNF	1.0	12	17	16.3	23	19	27	25.7	36.6	22	31	29.8	42
M10	UNF	1.25	20	29	27.1	39.3	35	47	47.4	63.7	40	52	54.2	70.5
M12	UNF	1.25	31	41	42	55.6	56	68	75.9	92.1	62	75	84	101.6
M14	UNF	1.5	52	64	70.5	86.7	90	106	122	143.6	107	124	145	168
M16	UNF	1.5	69	83	93.5	112.5	120	138	162.6	187	140	158	189.7	214.1
M18	UNF	1.5	100	117	136	158.5	177	199	239.8	269.6	202	231	273.7	313
M20	UNF	1.5	132	150	178.9	203.3	206	242	279.1	327.9	246	289	333.3	391.6

Use the above torques when special torque is not given.

NOTE: These values apply to fasteners as received from supplier, dry, or when lubricated with normal engine oil. They do not apply if extreme pressure lubricants are used.

WARRANTY

12

PRONOVEST warrants this product to the initial purchaser for the period of one year from the date of purchase against defects in materials and workmanship.

We will replace or repair defective parts free of charge if they are returned to our plant in St-Tite, Quebec, Canada.


Transportation charges are the responsibility of the customer. This warranty is not transferable.

Hydraulic cylinders and motors are covered by the manufacturer of these items.

All PRONOVEST spare parts purchased are covered by a three (3) month warranty.

This warranty becomes void and nul if the equipment is modified, breaks down as the result of an accident, is not operated according to manufacturer's recommendations, damaged by negligence or if maintenance has not been carried out as specified.

Our obligation is limited to the replacement or repair of the defective part. PRONOVEST accepts no responsibility for direct or indirect consequential damages of any kind.



Ce manuel est aussi disponible en français.
Veuillez téléphoner.



LES MACHINERIES PRONOVOOST INC.
260, route 159,
Saint-Tite, Quebec, Canada, G0X 3H0
Tel.: (418) 365-7551, Fax: (418) 365-7954