

JOCKEY WHEELS

The high class range of standard solid tyre jockey wheels are available with and without standard clamps.


This style of general purpose jockey wheel is suitable for most trailer/caravan applications.

For soft ground surfaces we suggest a large diameter jockey wheel.



PREMIUM JOCKEY WHEELS (JW) WITH AND WITHOUT CLAMPS

PART NO	CODE NO	DESCRIPTION	WEIGHT (KG)	SURFACE FINISH	STATIC CAPACITY (KG)	OUTER TUBE DIAMETER	D (MM) (NOMINAL)	H (MM)	H2	G1	G2	L1
626100	JW6	J/Wheel 150mm (6") with clamp	5.5	Zinc Plated	400kg	48mm	150	507	772	202	467	182
626600	JW6X	J/Wheel 150mm (6") no clamp	4.5	Zinc Plated	400kg	48mm	150	507	772	202	467	182
628100	JW200	J/Wheel 200mm (8") with clamp	7	Zinc Plated	400kg	48mm	200	567	832	262	522	182
628600	JW200X	J/Wheel 200mm (8") no clamp	6	Zinc Plated	400kg	48mm	200	567	832	262	527	182
628325	JW200EH	J/Wheel 200mm (8") extra height with clamp	7	Zinc Plated	400kg	48mm	200	730	995	370	635	132
623650	JW250	J/Wheel 250mm (10") solid tyre with clamp	9	Zinc Plated	400kg	48mm	250	635	885	325	575	180
627600	JW200HDX	J/Wheel 200mm (8") Heavy Duty (weld on) no clamp	9	Zinc Plated	400kg	60mm	200	700	950	N/A	N/A	N/A

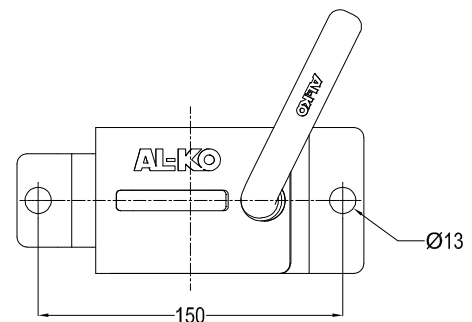

CLAMPS

PART NO	DESCRIPTION	WEIGHT (KG)	SURFACE FINISH	OUTER TUBE DIAMETER
629900	Clamp – Weld on - bolt on	1	Zinc Plated	48mm
629915	Clamp – Extra wide*	1.5	Zinc Plated	48mm
622200	Clamp – Cast base - bolt on	1	Zinc Plated	48mm

*Using the premium extra wide clamp on the premium jockey wheel range increases the jockey wheel static capacity. Please ask AL-KO customer service staff for further details.