

# turbo

Recommended  
Optional  
pag 38-39




Electro-hydraulic safety control with push button over ride

## SINGLE TURBO WITH BLADE

Standard machine:

FRAME	SAFETY	ON THE TRACTOR
<ul style="list-style-type: none"> <li>- 3 point hitch CAT.1-2</li> <li>- Hoeing blade cm.50 with open disc for blade</li> <li>- Manual side shift (Narrow)</li> <li>- Hydraulic side shift (Wide)</li> <li>- Hydraulic tilting</li> <li>- Adjustable gauge wheels</li> </ul>	<ul style="list-style-type: none"> <li>- Electro-hydraulic safety control with push button over ride</li> <li>- Max pressure valve</li> </ul>	<ul style="list-style-type: none"> <li>- N.1 Double-acting distributor (Narrow)</li> <li>- N.2 Double-acting distributors (Wide)</li> <li>- N.1 Single-acting distributor</li> <li>- N.1 Pressure free return</li> </ul>

CODE DESCRIPTION

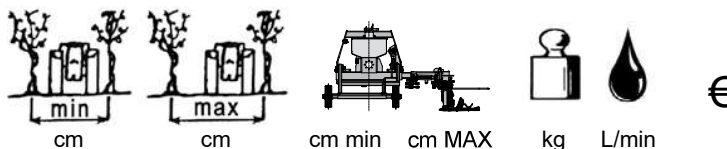

		min cm	max cm	cm min	cm MAX	kg	L/min	€
<b>REAR MODEL</b>								
6TLSN11E	TURBO Narrow blade bar 110	160	330	105	165	310	30	
6TLSW17E	TURBO Wide blade bar 170	250	450	155	215	340	30	
6TLSW20E	TURBO Wide blade bar 200	300	600	165	275	360	30	
<b>FRONT MODEL</b>								
6TLSN11AE	TURBO Narrow blade bar 110 (front mount)	160	300	105	155	310	30	
6TLSW17AE	TURBO Wide blade bar 170 (front mount)	250	450	155	215	340	30	
6TLSW20AE	TURBO Wide blade bar 200 (front mount)	300	600	165	285	360	30	

ACCESSORIES CODE DESCRIPTION



18172 2 movements electrohydraulic control for tractor with cabins



18173 3 movements electrohydraulic control for tractors with cabin



60333 Hydraulic side shift (only for Turbo Narrow) (+1 movement)

60347 Price increase for hydraulic height adjustment wheels support (+1 movement)

NB: All models are fitted as standard with hydraulic hoses 1m long from the three-point hitch. For longer hoses a price increase of € 15.00 per meter per hose will be required.

